



Dynamic Engineers, Inc.

Products Brochure

Frequency Control Solutions

OXC0

TCX0

X0

VCX0

Custom Crystal Filter

Custom LC Filter Module

Custom SMD VCO Device

www.DynamicEngineers.com

World Class Supplier of Frequency Control Technology

Since 1986, Dynamic Engineers Inc. of Houston, Texas, has been supplying global customers with tailored solutions to their RF component requirements. We have design engineers with the right experience and expertise to customize standard product designs to meet special functional parameters.

Areas of Expertise:

- **OCXO : Oven Controlled Crystal Oscillators**
 - Low Phase Noise Oscillators
 - Miniature high performance Ovenized Oscillators
 - Ultra-stable Double Ovens
- **TCXO : Temperature Compensated Crystal Oscillators**
 - Ultra-stability
 - Low power consumption
 - 5G reference
- **VCXO : Voltage Controlled Crystal Oscillators**
- **XO : Crystal Clock Oscillators**
- **Timing and Frequency Source Modules**
- **Crystal and LC Filters**
- **Tunable Filter Modules**
- **VCO : Voltage Controlled Oscillators**

Focus Applications

- **SATCOM**
- **5G / Mobile Communications**
- **Test Instrumentation**

Quality and Customer Service

Dynamic Engineers utilizes its comprehensive industry experience to transform general customer requirements into highly reliable, cost effective Frequency Control Solutions, with 100% support through the entire product life cycle from proto-type stage until end of life.

Export Control Compliance

Dynamic Engineers uses a well-established internal document control system to monitor our compliance with the U.S. Export Administration Regulations.




Dynamic Engineers, Inc.

Company Introduction

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

Basic Radio Architecture

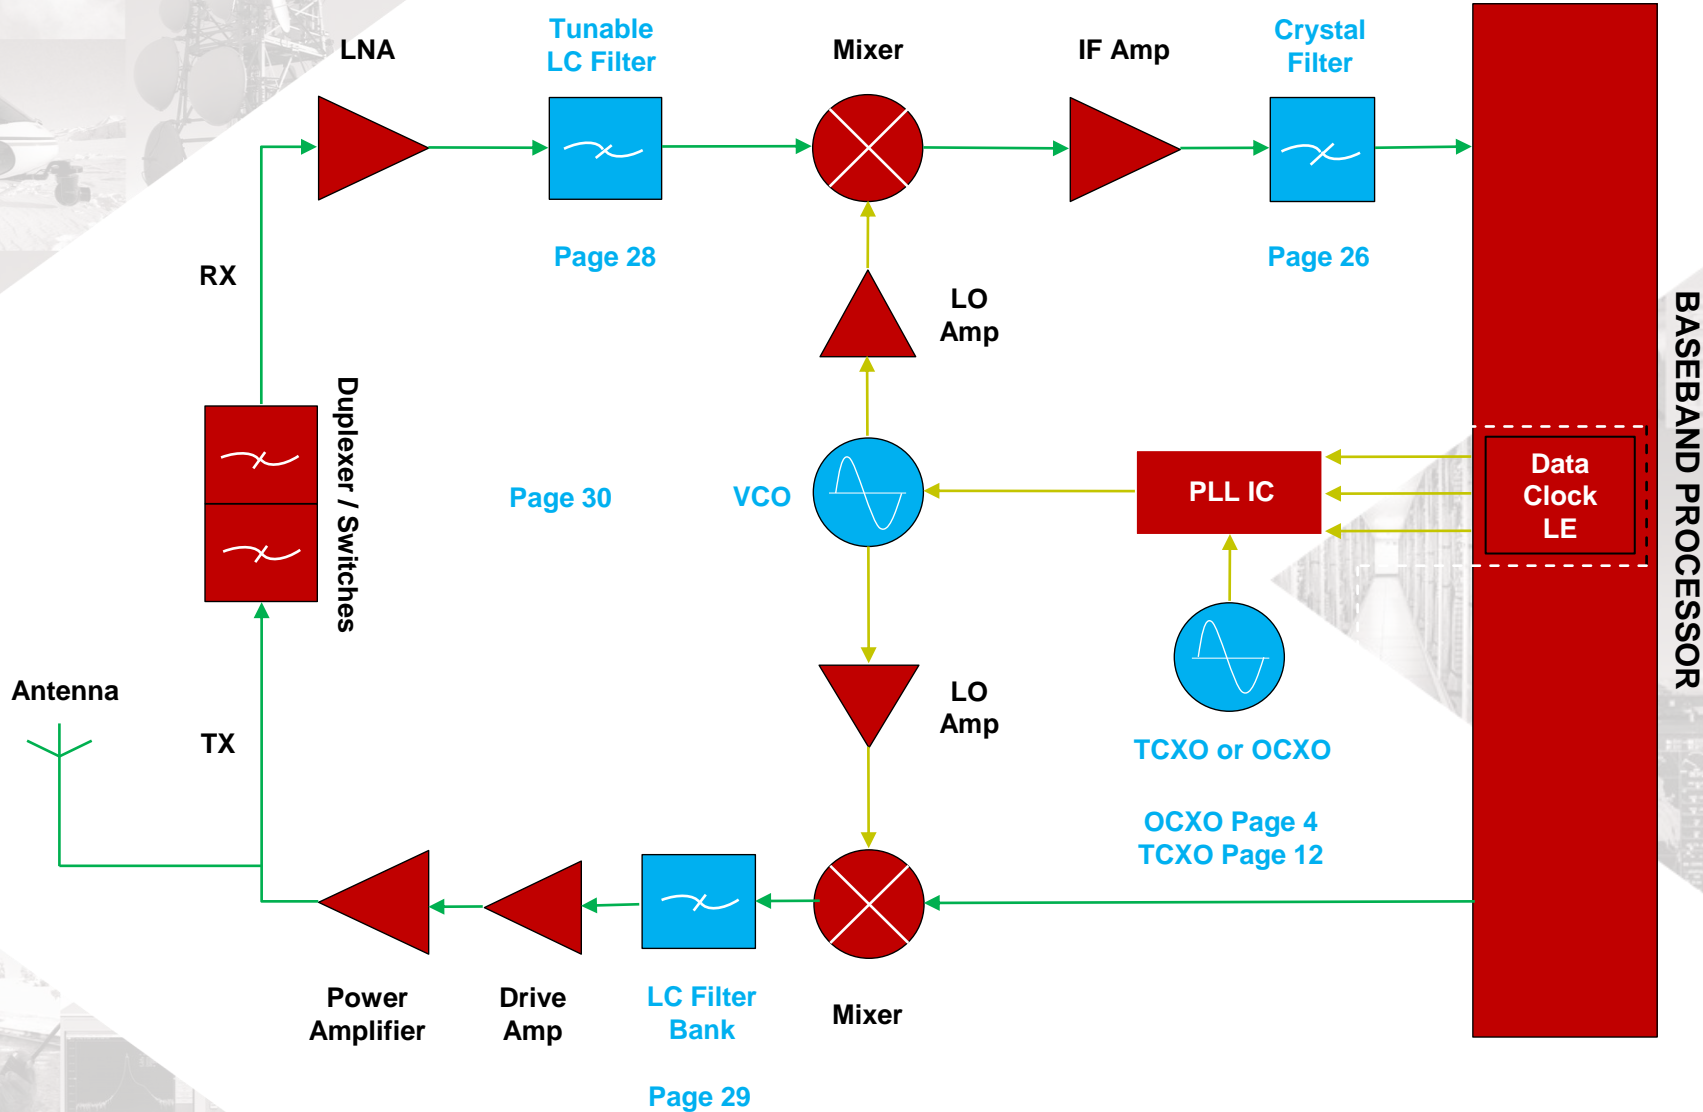

Devices highlighted in blue can be provided by Dynamic Engineers.



Dynamic Engineers, Inc.

Radio Diagram

CONTACT US :
www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

OCXO : Oven Controlled Crystal Oscillator

4

- Vibration Isolated OCXO
- Ultra Low Power Miniature OCXO
- Low Profile Miniature OCXO (7.5 mm Max Height)
- Extreme Low Temperature Miniature OCXO (-60° C)
- Extreme High Temperature OCXO +130° C
- Ultra-Stable DOCXO
- Superior Allan Deviation OCXO
- Ultra-Low Phase Noise OCXO (10 to 120 MHz)
- High Performance SMD OCXO
- High Performance 500 MHz OCXO
- Expanded Selection of Standard Package OCXO

TCXO : Temperature Compensated Crystal Oscillator

12

- Satellite Communication SMD TCXO
 - BeiDou, GPS, Galileo
- High Stability Miniature SMD TCXO
- New Generation High Temperature Stability 0.1 ppm SMD TCXO
- Next Generation 5G Reference Oscillator Solutions
- Extended Temperature TCXO (-55 to +105° C)
 - Expanded Selection of SATCOM ET TCXO
- 10 to 1450 MHz Quick Delivery VCTCXO (Size: 2.5x3.2 mm)
- 10 to 1450 MHz Quick Delivery VCTCXO (Size: 5x7 mm)
- Low-G SATCOM TCXO (Less than 0.5 ppb/G)
- Ultra High Stability TCXO (Dual Compensation Process)
- Expanded Selection of Large Package TCXO to 800 MHz

XO : Crystal Clock Oscillator

19

- Extended Temperature Range XO (-55 to +125° C)
- Extreme Temperature XO (-100 to +300° C)
- Lowest Jitter XO
(Integrated Phase Jitter in Femto-seconds)
- Expanded Selection of Standard Package XO

VCXO : Voltage Control Crystal Oscillators

22

- Lowest Jitter VCXO (frequency: Up to 2.1 GHz)
- SMA Output Connector VCXO
- Expanded Selection of Standard Package VCXO

Timing and Custom GHz Frequency Source Module

24

- Timing Module
- Custom GHz Frequency Source Module

Custom Crystal Filter

26

- Narrow Band Custom Crystal Filter
- Wide Band Custom Crystal Filter
- Ultra Narrow Band Crystal Filter

Custom LC Filter Modules

28

- Custom LC Filter Design (frequency: Up to 6 GHz)
- Tunable LC Filters (frequency: 225MHz – 512MHz)
- Filter Banks (frequency: 30MHz – 512MHz)

VCO : Voltage Controlled Oscillators

30

- Product Table of VCO Design Capability



Dynamic Engineers, Inc.

Table Of Contents


CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822


Vibration Isolated OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers' state-of-the-art vibration isolated OCXO5050L-100MHz-C-V features a 100MHz SC-cut crystal that is impedance matched to the oscillator and amplifier circuits to deliver ultra low phase noise under rugged environment our specially designed vibration isolated enclosure.

- **Stationary Phase Noise:**
 - 132 dBc/Hz at 100Hz offset
 - 163 dBc/Hz at 1000Hz offset
- **Under Vibration Phase Noise:**
 - 100 dBc/Hz at 100Hz offset
 - 170 dBc/Hz at 1000Hz offset
- Frequency Range: 100MHz
- Voltage range: 10V to 15V
- Output: 50 Ohm Sine Wave
- Stability: ± 100 ppb
- Temperature range: -55 to +85°C
- Available with SMA connector

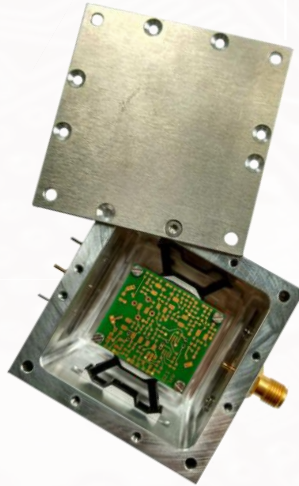

OCXO5050L-100MHz-C-V
Expected phase noise under vibration for worst axis

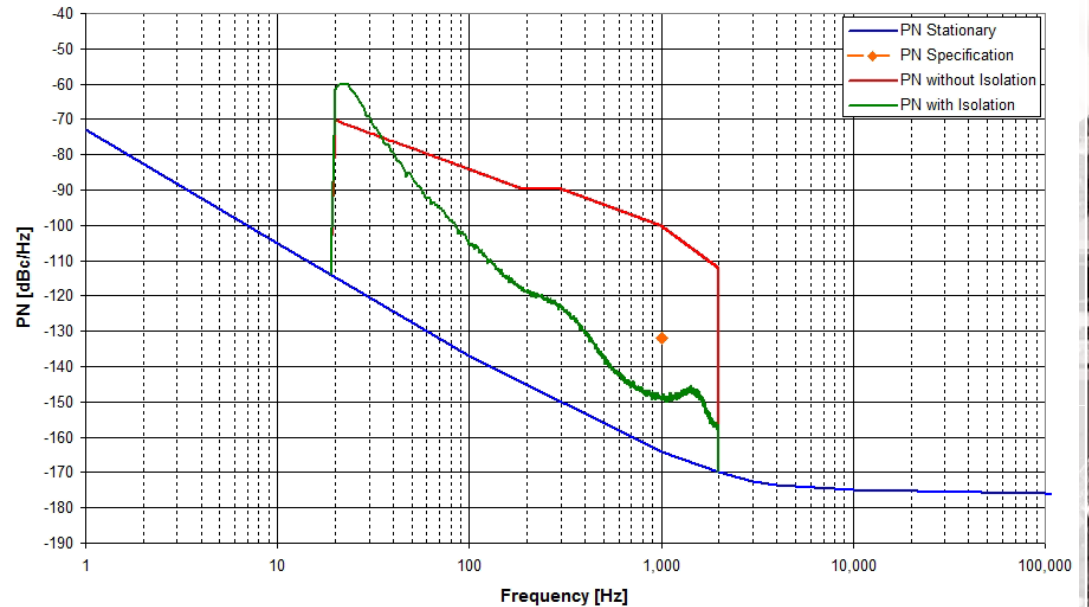

Model	Package (mm)	Phase Noise (typ.)	Vibration	Comments
OCXO5050L-100MHz-C-V	50 x 50 x 30	<p>At Rest</p> <ul style="list-style-type: none"> -132 @ 100Hz -163 @ 1KHz -175 @ ≥ 10KHz <p>Under Random Vibration</p> <ul style="list-style-type: none"> -100 @ 100Hz -145 @ 1KHz -170 @ 10KHz 	<p>Vibration 1: Random test without powering the OCXO 50~100 Hz, 1000~2000 Hz, tolerance: ± 1.5 dB.</p> <p>Vibration 2: Vibration test when OCXO powered Test in 3 directions X/Y/Z Axes, each test lasts 1hr 20~300Hz, 1000~2000Hz, tolerance: ± 1.5dB</p>	<p>Please consult DEI for specific random vibration profile that the device under test is exposed to.</p> <p>Specific customer random vibration profiles will influence the shape of the GREEN vibration compensated dynamic phase noise performance.</p> <p>80 and 120 MHz operating frequencies are also considered standard products in this family.</p>



Dynamic Engineers, Inc.

OCXO : Oven Controlled


CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

Ultra Low Power Miniature OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers continues to enhance our miniature OCXO product platform in the critical areas of frequency stability over temperature, long term aging, and phase noise performance in stages of incremental improvements.

- Better than -170 dBc/Hz phase noise
- ± 20 ppb frequency stability can be maintained all the way down to -60°C

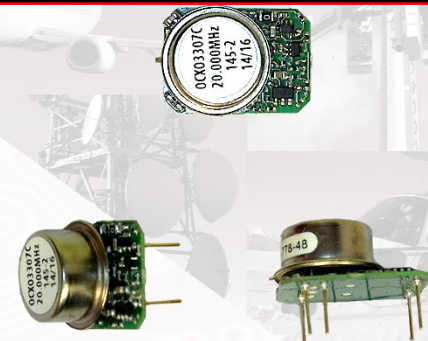

Model	Power Supply	Output Type	Frequency Range (MHz)	Frequency Stability (ppb)	Operating Temperature Range ($^{\circ}\text{C}$)	Package (mm)
OCXO3306C	3.3, 5	CMOS or Sine	8 to 120	± 50	-40 to +85	15.1 x 20.5 x 10
OCXO3307C-ET	3.3, 5	CMOS or Sine	8 to 150	± 20	-60 to +85	15.1 x 20.5 x 10
OCXO3308C	3.3, 5	CMOS or Sine	8 to 150	± 3	-40 to +85	15.1 x 20.5 x 10
OCXO3309C	3.3, 5	CMOS or Sine	8 to 150	± 5	-40 to +85	15.1 x 20.5 x 10
OCXO3311C	3.3, 5	CMOS or Sine	8 to 100	± 50	-40 to +85	15.1 x 15.9 x 10
OCXO3312C	3.3, 5	CMOS or Sine	8 to 150	± 5	-40 to +85	15.1 x 15.9 x 8.8
OCXO3313C	3.3, 5	CMOS or Sine	8 to 150	± 5	-40 to +85	15.1 x 15.9 x 8.8
OCXO3317AW	3.3, 5	HCMOS or Sine	8 to 100	± 10	-40 to +85	16.0 x 15.1 x 10.5
OCXO3318AW	3.3, 5	HCMOS or Sine	8 to 150	± 5	-40 to +85	16.0 x 15.3 x 11.6
OCXO3319AW	3.3, 5	HCMOS or Sine	30 to 300	± 5	-60 to +85	21.6 x 15.3 x 9.5
OCXO3320AW	3.3, 5	HCMOS or Sine	8 to 100	± 5	-60 to +85	16.0 x 15.0 x 7.5

The Best Stability Available is a Function of Operating Temperature Range

Daily Aging of ± 0.2 ppb per day



Dynamic Engineers, Inc.

OCXO : Oven Controlled

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Low Profile Miniature OCXO : Oven Controlled Crystal Oscillator (7.5 mm Max Height)

OCXO3320AW (Height: 7.5 mm low profile)

The OCXO3320AW series low profile miniature OCXO offers a wide frequency range, outstanding frequency stability and low phase noise performance, all with very fast warm-up and low power consumption in an 7.5 mm low profile design.

- Wide Frequency Range 8 to 100 MHz
- Frequency Stability less than or equal to 10 ppb
- Very low profile (as low as **7.5 mm** height packaging)
- Low power consumption (as low as 180mW at +25°C)
- Low phase noise (-163 dBc/Hz floor at 100MHz)
- **Fast warm-up (30 to 60 seconds)**




Extreme Low Temperature Miniature OCXO : Oven Controlled Crystal Oscillator (-60°C)

OCXO3307C-ET (Height: 9.5 mm and down to -60°C operating temperature)

The OCXO3307C-ET extreme low temperature miniature OCXO incorporates internal heating resonator technology with the entire oven control mechanical structure packaged inside the TO-8 vacuum holder. This design offers a drastic reduction in volume, power consumption, and warm-up time while still maintaining outstanding frequency stability and phase noise performance normally associated with devices in much larger enclosures, yet allows the OCXO to operate at extreme cold temperature of -60°C.

- Low power consumption (less than 0.18 Watts typ. at +25°C after 60 second warm up)
- Less than ± 20 ppb over -60 to +85°C at 10 MHz
- Less than ± 30 ppb per year aging at 10 MHz
- 9.5 mm max. height



Dynamic Engineers, Inc.

OCXO : Oven Controlled


CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

Extreme High Temperature OCXO : Oven Controlled Crystal Oscillator **+130°C**

Dynamic Engineers' remarkable Extreme Temperature OCXO, the ETOCXO2020C-10MHz-A-V, features ambient temperatures reaching as high as **+130°C**. Exclusive high temperature bonding materials and processing techniques allow this model to achieve ultra-stable output and superior long term reliability at extreme temperatures.

- Stability: ± 10 ppb over -40 to **+130°C**
- Low Aging: ± 0.3 ppb per day aging
- Applications: Oil Drilling
- Low Phase Noise: -170 dBc/Hz @ 100 kHz
- Frequency Range: 5 to 30 MHz



Extended Temperature High Stability OCXO : Oven Controlled Crystal Oscillator (**-55°C to +100°C**)

OCXO2020AW-10MHz-B-V (Extended temperature high stability)

The OCXO2020AW-10MHz-B-V extended temperature high stability OCXO offers superior (up to ± 5 ppb) frequency stability under extended operating temperature conditions between **-55°C to +100°C**.

- ± 5 ppb Frequency Stability
- **-55°C to +100°C** extended operating temperature
- Low aging rate: ± 0.2 ppb / day, ± 0.02 ppm / year
- Low phase noise (-168 dBc/Hz floor at 100MHz)



Dynamic Engineers, Inc.

OCXO : Oven Controlled

Ultra-Stable DOCXO : Double-Oven Controlled Crystal Oscillator

The DOCXO2020C ultra-stable DOCXO can achieve less than ± 0.1 ppb stability in a small 20 x 20 mm enclosure by taking advantage of proprietary advances in resonator heating processes, which allow for a significant reduction in the oven-control thermal mass structure. As a result the Dynamic Engineer's DOCXO draws 50% less power than traditional designs offered by competitors in much larger product footprints (36 x 27 mm).

The DOCXO3627C also offers up to ± 0.05 ppb frequency stability over operating temperature.



DOCXO2020C:

Frequency: 5 to 100 MHz

Frequency Stability: ± 0.1 ppb over -40°C to $+80^{\circ}\text{C}$

Aging: ± 0.1 ppb/day


Allan Variance: 5×10^{-12} /s

DOCOX3627C

Frequency: 5 to 100MHz

Frequency Stability: ± 0.05 ppb over -40°C to $+80^{\circ}\text{C}$

Aging: ± 0.1 ppb/day

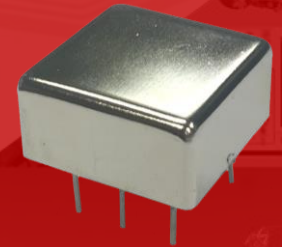

Superior Allan Deviation OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers offers two OCXO products specially designed to deliver superior Allan deviation performance (short term stability) with a standard 10 MHz, low noise sine wave, and 12V power supply. Advanced low noise crystal processes are utilized to deliver outstanding 1 Hz to 100 Hz close-in phase noise which translates into world class Allan deviation performance. Applications demanding precise timing synchronization such as SATCOM ground stations, 4G-LTE networks, and high data rate digital modulation systems are ideal for these OCXOs.

Model	Device Type	Output Type	Allan Deviation (ppb) (for tau = 1 sec)	Frequency Stability (ppb) (-40 to +85°C)	Close In Noise (dBc/Hz)			Package (mm)
					1 Hz	10 Hz	100 Hz	
OCXO5050Z-10MHz-A-V	Low Phase Noise	Sine	0.0006	± 0.2	-108	-137	-157	50.8 x 50.8 x 16.0
DOCXO3627C	Low Phase Noise	CMOS, Sine	0.001	± 0.1	-100	-130	-147	35.4 x 26.7 x 16.3
OCXO3627L-10MHz	Low Phase Noise	Sine	0.002	± 25.0	-115	-146	-157	36.1 x 27.1 x 14.0



Dynamic Engineers, Inc.

OCXO : Oven Controlled

CONTACT US :



www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Ultra-Low Phase Noise OCXO : Oven Controlled Crystal Oscillator : 10 to 120 MHz

The OCXO2525L-100MHz-LG-XX ultra low phase noise OCXO delivers instrument grade performance with:

- Less than -160 dBc/Hz @ 1 KHz offset
- +13 dBm min. ultra low noise sine wave output
- ±100 ppb max stability from 0°C to +80°C
- Low-G sensitivity options available

Typical Noise for OCXO2525L-100MHz-LG-XX @ 100 MHz Operating Frequency

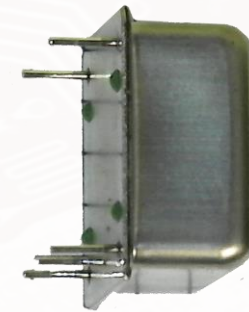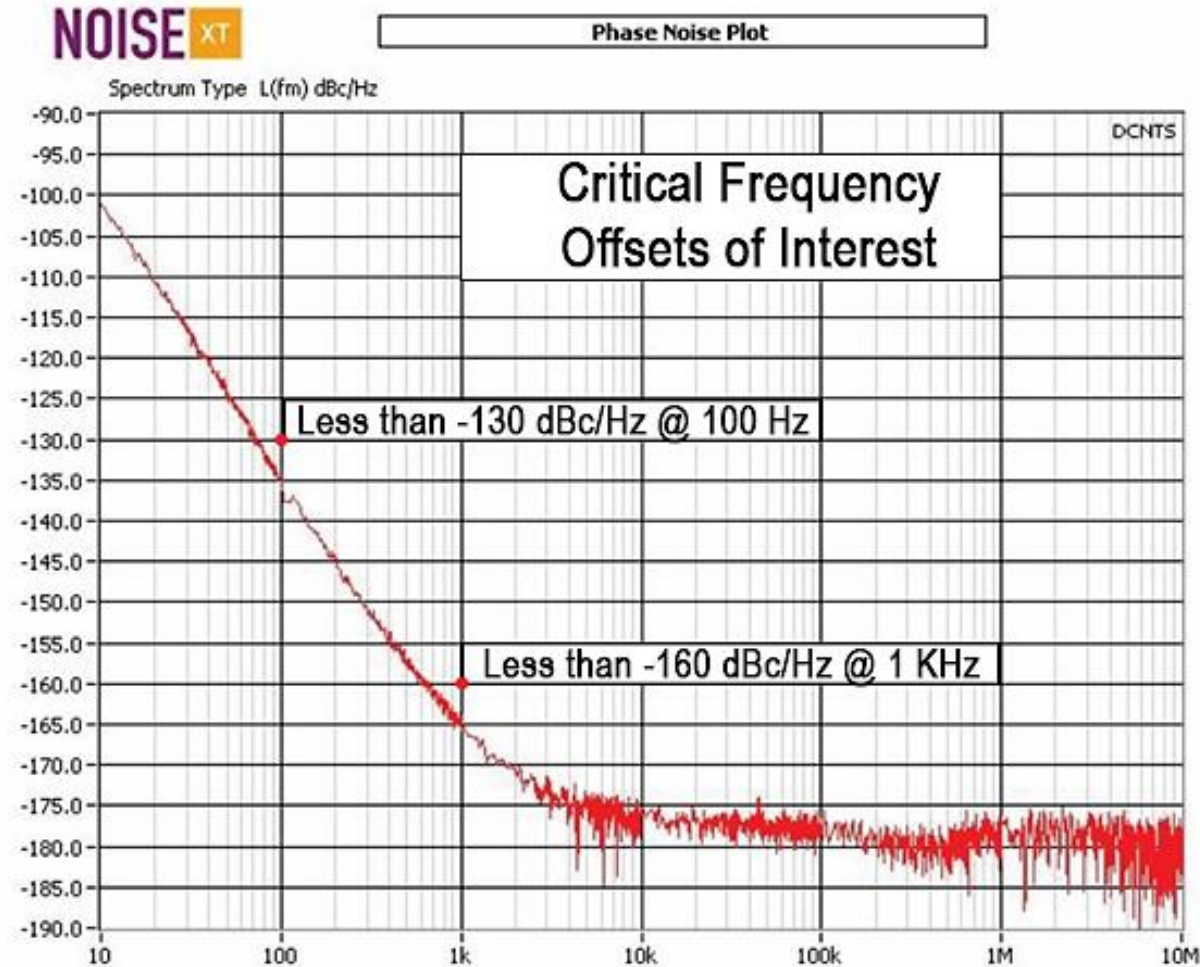

Dynamic Engineers, Inc.

OCXO : Oven Controlled

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

High Performance SMD OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers offers a wide selection of high performance OCXO devices in surface mount packages. They range from 9 x 14 to 28 x 28 mm footprints. Operating frequencies covering 8 to 150 MHz can be obtained. Small cell 4G LTE infrastructure, SATCOM, mobile radio, and test instrumentation (synthesizer) clock references are all current applications being served by our surface mount OCXOs.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppb)	Operating Temperature (°C)	Package (mm)
OCXO2522L-10MHz	Standard	12	Sine	10	±5	-20 to +70	22 x 25.4 x 14
OCXO2522LULN1	Extended Temp	12	Sine	100	±5	-55 to +85	22 x 25.4 x 14
OCXO2522LULN2	Extended Temp	12	Sine	120	±5	-55 to +85	22 x 25.4 x 14
OCXO2828LULN1	Extended Temp	12	Sine	100	±5	-55 to +85	27.8 x 27.8 x 15.5
OCXO2828LULN2	Extended Temp	12	Sine	120	±5	-55 to +85	27.8 x 27.8 x 15.5
OCXO1615C	Extended Temp	3.3 or 5.0	CMOS or Sine	8 to 150	±10	-60 to +85	15.2 x 16 x 9.5
OCXO914S	Standard	3.3 or 5.0	CMOS	10 to 40	±30	-40 to +85	9.3 x 14.3 x 6.5

High Performance 500 MHz OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers offers a wide frequency range (48 to 500 MHz) OCXO family in an industry standard 25 x 25 mm leaded enclosure. As a special ordering option, the customer can obtain the 12.7 mm height version with an SMA connector attached to the center of the signal pin base assembly. Test instrumentation, cellular infrastructure, and communications are some markets currently served by this OCXO family.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppb)	Operating Temperature (°C)	Package (mm)
OCXO2525ZS-LN	Low Phase Noise	12	Sine	48 to 500	±100	-40 to +70	25.8 x 25.8 x 10
OCXO2525Z-SMA	Low Phase Noise	12	Sine	48 to 500	±100	-40 to +70	25.8 x 25.8 x 12.7



Dynamic Engineers, Inc.

OCXO : Oven Controlled

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Expanded Selection of Standard OCXO : Oven Controlled Crystal Oscillator

Dynamic Engineers is pleased to offer an expanded selection of standard OCXO package and performance configurations with a broad range of parameters. Customers can also order special functions such as oven standby, and specify unique requirements for short-term stability, noise, and non-standard frequencies.

- Standard DIP enclosures
- 50 ohm sine output
- 36 x 27 mm Europack size
- ± 0.5 ppb stability over temperature for various applications

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppb)	Operating Temperature (°C)	Package (mm)
OCXO2013Z1	Standard	3.3	CMOS	10 to 52	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2013Z2	Standard	5	CMOS	10 to 52	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2013Z3	Standard	12	CMOS	10 to 52	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2013ZS1	Standard	3.3	Sine	10 to 60	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2013ZS2	Standard	5	Sine	10 to 60	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2013ZS3	Standard	12	Sine	10 to 60	± 200	-40 to +85	13.2 x 20.8 x 7.8
OCXO2020ZS1	Standard	5	Sine	8.192 to 20	± 3	-40 to +85	20 x 20 x 12.7
OCXO2020ZS2	Standard	12	Sine	8.192 to 20	± 3	-40 to +85	20 x 20 x 12.7
DOCXO3627Z	Double Oven	12	Sine	5 to 10	± 0.5	-40 to +70	27 x 36 x 19
OCXO3627Z-LG1	Low G	5	Sine	5 to 20	± 2	-40 to +85	27 x 36 x 16
OCXO3627Z-LG2	Low G	12	Sine	5 to 20	± 2	-40 to +85	27 x 36 x 16
OCXO3627Z-LN1	Low Phase Noise	5	Sine	48 to 120	± 100	-40 to +70	27 x 36 x 16
OCXO3627Z-LN2	Low Phase Noise	12	Sine	48 to 120	± 100	-40 to +70	27 x 36 x 16
OCXO2215LSQ1	Extended Temp	3.3	CMOS	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11
OCXO2215LSQ2	Extended Temp	5	CMOS	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11
OCXO2215LSQ3	Extended Temp	12	CMOS	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11
OCXO2215LS1	Extended Temp	3.3	Sine	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11
OCXO2215LS2	Extended Temp	5	Sine	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11
OCXO2215LS3	Extended Temp	12	Sine	10 to 125	± 5	-55 to +85	15.1 x 22.7 x 11



Dynamic Engineers, Inc.

OCXO : Oven Controlled

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Satellite Communication SMD TCXO : Temperature Compensated Crystal Oscillator

Dynamic Engineers has devoted special focus to developing TCXOs specially optimized for global satellite system applications with outstanding performance. This enables our customers to meet the various requirements of BeiDou, GPS, and Galileo components and sub-systems.

- Less than 0.2 ppm frequency stability
- World class TCXO ± 0.1 ppb short term stability
- Excellent phase noise of less than -145 dBc/Hz @ 1 KHz

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO7500ZCS1	SATCOM	3.3	Clipped Sine	10 to 25	± 0.1	-20 to +70	5 x 7 x 1.75
TCXO7500ZCS2	SATCOM	3.3	Clipped Sine	10 to 25	± 0.2	-40 to +85	5 x 7 x 1.75
TCXO7500ZSQ1	SATCOM	3.3	CMOS	10 to 25	± 0.1	-20 to +70	5 x 7 x 1.75
TCXO7500ZSQ2	SATCOM	3.3	CMOS	10 to 25	± 0.2	-40 to +85	5 x 7 x 1.75
TCXO5300ZCS1	SATCOM	3.3	Clipped Sine	10 to 25	± 0.1	-20 to +70	3.2 x 5 x 1.7
TCXO5300ZCS2	SATCOM	3.3	Clipped Sine	10 to 25	± 0.2	-40 to +85	3.2 x 5 x 1.7
TCXO5300ZSQ1	SATCOM	3.3	CMOS	10 to 25	± 0.1	-20 to +70	3.2 x 5 x 1.7
TCXO5300ZSQ2	SATCOM	3.3	CMOS	10 to 25	± 0.2	-40 to +85	3.2 x 5 x 1.7
TCXO7500ZCS3	Extended Temp	3.3	Clipped Sine	10 to 25	± 0.25	-40 to +95	5 x 7 x 1.75
TCXO7500ZSQ3	Extended Temp	3.3	CMOS	10 to 25	± 0.25	-40 to +95	5 x 7 x 1.75
TCXO5300ZCS3	Extended Temp	3.3	Clipped Sine	10 to 25	± 0.25	-40 to +95	3.2 x 5 x 1.7
TCXO5300ZSQ3	Extended Temp	3.3	CMOS	10 to 25	± 0.25	-40 to +95	3.2 x 5 x 1.7

Dynamic Engineers current list of qualified SATCOM TCXO's are listed below. These represent designs already incorporated in other generations of SATCOM device and sub-system development.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO3225T-10MHz-B-V	SATCOM	3.3	Clipped Sine	10	± 0.5	-40 to +85	2.5 x 3.2 SMD
TCXO5300Z-10MHz-A-V	Extended Temp	3.3	CMOS	10	± 1.0 (-55 to -40°C) ± 0.28 (-40 to +85°C)	-55 to +85	3.2 x 5.0 SMD
TCXO5300S-10MHz-A-V	SATCOM	3.3	Clipped Sine	10	± 0.28	-40 to +85	3.2 x 5.0 SMD
T5300TMP-16.32MHz-A	SATCOM	3.3	CMOS	16.32	± 0.5	-40 to +85	3.2 x 5.0 SMD
TCXO3403-10.000MHz-A	SATCOM	3.3	Clipped Sine	10	± 0.5	-40 to +85	5.0 x 7.0 SMD
TCXO7500T-10MHz-B	SATCOM	3.3	CMOS	10	± 0.5	-40 to +85	5.0 x 7.0 SMD



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

High Stability Miniature SMD TCXO : Temperature Compensated Crystal Oscillator

This collection of high stability (up to 0.1 ppm) TCXO devices incorporates standard technology that customers can tailor to their specific requirements. These devices are currently being used in mobile radio and SATCOM modem applications with global customers.

Model	Device Type	Power Supply	RF Output	Frequency (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO5300S-20MHz-A-V	High Stability	3.3	CMOS	20.0	±0.1	-25 to +70	3.2 x 5.0 SMD
TCXO5300THP-10MHz-D-V	High Stability	3.3	Clipped Sine	10.0	±0.28	-40 to +85	3.2 x 5.0 SMD
TCXO7500S-12.8MHz-A	High Stability	3.3	CMOS	12.8	±0.28	-40 to +85	5.0 x 7.0 SMD
TCXO5300Z-UHS-10.0MHz	High Stability	3.3	Clipped Sine	10.0	±0.1	-40 to +85	5.0 x 3.2 SMD
TCXO5300Z-UHS-19.2MHz	High Stability	3.3	Clipped Sine	19.2	±0.1	-40 to +85	5.0 x 3.2 SMD
TCXO5300Z-UHS-20.0MHz	High Stability	3.3	Clipped Sine	20.0	±0.1	-40 to +85	5.0 x 3.2 SMD
TCXO7500Z-UHS-20.0MHz	High Stability	3.3	CMOS	20.0	±0.1	-40 to +85	5.0 x 7.0 SMD
TCXO7500Z-UHS-28.8MHz	High Stability	3.3	CMOS	28.8	±0.1	-40 to +85	5.0 x 7.0 SMD

New Generation High Temperature SMD TCXO : Temperature Compensated Crystal Oscillator

Dynamic Engineers has released a new generation of high temperature TCXOs under hot environment. High performance mobile radio / manpacks are also ideal applications.

- Less than ±0.1 ppm stability
- Operating temperature up to 105°C

Model	Device Type	Power Supply	RF Output	Frequency (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO7501BM	Ultra-High Stability	3.3	CMOS Clipped Sine	10 - 52	±0.1	-40 to +95	7.0 x 5.0 x 1.9
TCXO7502BM	Ultra-High Stability	3.3	CMOS Clipped Sine	10.0, 19.2, 20.0	±0.1	-40 to +105	7.0 x 5.0 x 1.9
TCXO5302BM	Ultra-High Stability	2.5, 3.3	CMOS Clipped Sine	10 - 52	±0.1	-40 to +105	5.00 x 3.20 x 1.85



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

CONTACT US :

www.DynamicEngineers.com
 Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Next Generation 5G Reference Oscillator Solutions TCXO

Dynamic Engineers is working with global telecom organizations to help define the requirements of the clock reference TCXO utilized in the transceiver section of the 5G base station. To date infrastructure designers have selected 40 and 51.2 MHz devices in their initial beta evaluation systems.

Model	Device Type	Power Supply	RF Output	Frequency (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO7500Z-40MHz-A-V	Ultra-High Stability	3.3	CMOS	40	±0.5	-40 to +85	5 x 7
TCXO7500QC-51.2MHz-A-V	Ultra-High Stability	3.3	CMOS	51.2	±0.3	-40 to +85	5 x 7

Extended Temperature TCXO : Temperature Compensated Crystal Oscillator (-55 to +105 °C)

Dynamic Engineers extended temperature TCXOs utilize value-added compensation software to extend high stability beyond the traditional -40°C to +85°C industrial temperature range. Extending operation down to -55°C or up to +105°C typically requires careful control of crystal angle variation which influences the slope of the crystal curve at extreme operating temperatures.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO7500S-ET	Extended Temp	5.0	CMOS and Clipped Sine	5 to 52	±2	-40 to +105	5.0 x 7.0
TCXO7500S-ETZ-10MHz-A-V	Extended Temp	3.3	Clipped Sine	10	±0.8	-55 to +85	5.0 x 7.0
TCXO7500S-ETZ-20MHz-A-V	Extended Temp	3.3	Clipped Sine	20	±0.8	-55 to +85	5.0 x 7.0
TCXO7500ZCS3	Extended Temp	3.3	Clipped Sine	10 to 25	±0.25	-40 to +95	5.0 x 7.0
TCXO7500ZSQ3	Extended Temp	3.3	CMOS	10 to 25	±0.25	-40 to +95	5.0 x 7.0
TCXO5300ZCS3	Extended Temp	3.3	Clipped Sine	10 to 25	±0.25	-40 to +95	3.2 x 5.0
TCXO5300ZSQ3	Extended Temp	3.3	CMOS	10 to 25	±0.25	-40 to +95	3.2 x 5.0



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

CONTACT US :

www.DynamicEngineers.com
 Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

10 to 1450 MHz Quick Delivery VCTCXO (Size: 2.5 x 3.2 mm)



Dynamic Engineers miniature quick delivery VCTCXO can be delivered in 2-3 weeks for swift prototypes development in:

- Compact 2.5 x 3.2mm package
- Wide frequency range from 10 to 1450 MHz (up to 6th decimal place)
- CMOS, LVPECL or LVDS output

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO3225R-2.5V-LVCMOS	Quick Delivery	2.5	CMOS	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6
TCXO3225R-3.3V-LVCMOS	Quick Delivery	3.3	CMOS	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6
TCXO3225R-2.5V-LVPECL	Quick Delivery	2.5	LVPECL	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6
TCXO3225R-3.3V-LVPECL	Quick Delivery	3.3	LVPECL	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6
TCXO3225R-2.5V-LVDS	Quick Delivery	2.5	LVDS	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6
TCXO3225R-3.3V-LVDS	Quick Delivery	3.3	LVDS	10 to 1450	±1	-40 to +85	2.5 x 3.2 x 1.6

10 to 1450 MHz Quick Delivery VCTCXO (Size: 5 x 7 mm)



Dynamic Engineers standard quick delivery VCTCXO can be delivered in 2-3 weeks for rapid prototypes development in:

- Standard 5 x 7mm FR4 motherboard 6-pad package
- Wide frequency range from 10 to 1450 MHz (up to 6th decimal place).
- CMOS, LVPECL or LVDS output

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO7500AJ-2.5V-CMOS	Quick Delivery	2.5	CMOS	10 to 1450	±1	-40 to +85	5 x 7 x 2.5
TCXO7500AJ-3.3V-CMOS	Quick Delivery	3.3	CMOS	10 to 1450	±1	-40 to +85	5 x 7 x 2.5
TCXO7500AJ-2.5V-LVPECL	Quick Delivery	2.5	LVPECL	10 to 1450	±1	-40 to +85	5 x 7 x 2.5
TCXO7500AJ-3.3V-LVPECL	Quick Delivery	3.3	LVPECL	10 to 1450	±1	-40 to +85	5 x 7 x 2.5
TCXO7500AJ-2.5V-LVDS	Quick Delivery	2.5	LVDS	10 to 1450	±1	-40 to +85	5 x 7 x 2.5
TCXO7500AJ-3.3V-LVDS	Quick Delivery	3.3	LVDS	10 to 1450	±1	-40 to +85	5 x 7 x 2.5



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

New High Frequency and Low-G TCXO : Temperature Compensated Crystal Oscillator (Less Than 0.5 ppb/G)

Dynamic Engineers continues to invest in advanced High Frequency and Low-G TCXO technology capable of performing to less than 0.5 ppb per G. Standard Low-G output frequencies currently available include 10, 16.32, 19.2, 20, and 25 MHz in both 3.2 x 5 mm and 5 x 7 mm configurations. Rugged environmental conditions such as mobile SATCOM with high shock and vibration is a prime example of an end use application for these TCXO devices. We also offer high performance TCXO which are designed to be used in 5G networks.


Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO911BTLG_series	5G	3.3	CMOS	50 to 125	±1.0	-40 to +85	9.6 x 11.4 x 6.7
TCXO914BTLG_series	5G	3.3	Sinewave	50 to 150	±0.5	-40 to +85	9 x 14 x 6.7
TCXO7500ZLGCS	SATCOM	3.3	Clipped Sine	10 to 25	±0.5	-40 to +85	5 x 7 x 1.75
TCXO7500ZLGSQ	SATCOM	3.3	CMOS	10 to 25	±0.5	-40 to +85	5 x 7 x 1.75
TCXO5300ZLGCS	SATCOM	3.3	Clipped Sine	10 to 25	±0.5	-40 to +85	3.2 x 5 x 1.7
TCXO5300ZLGSQ	SATCOM	3.3	CMOS	10 to 25	±0.5	-40 to +85	3.2 x 5 x 1.7

Ultra-High Stability TCXO (Dual Compensation Process) : Temperature Compensated Crystal Oscillator

The Ultra-High Stability (UHS) TCXO family is based on Dynamic Engineers' proprietary compensation algorithms that take full advantage of precision crystal manufacturing process breakthroughs to deliver OCXO-like stability at a fraction of the power consumption.

Better than ±100 ppb stability can be maintained over an extended temperature range of -40 to +105°C. Better than ±50 ppb can be offered over -40 to +85°C.

High performance small cell base stations, mobile radio manpacks, and SATCOM reference clocks are ideal applications for this cutting edge TCXO design and process technology.

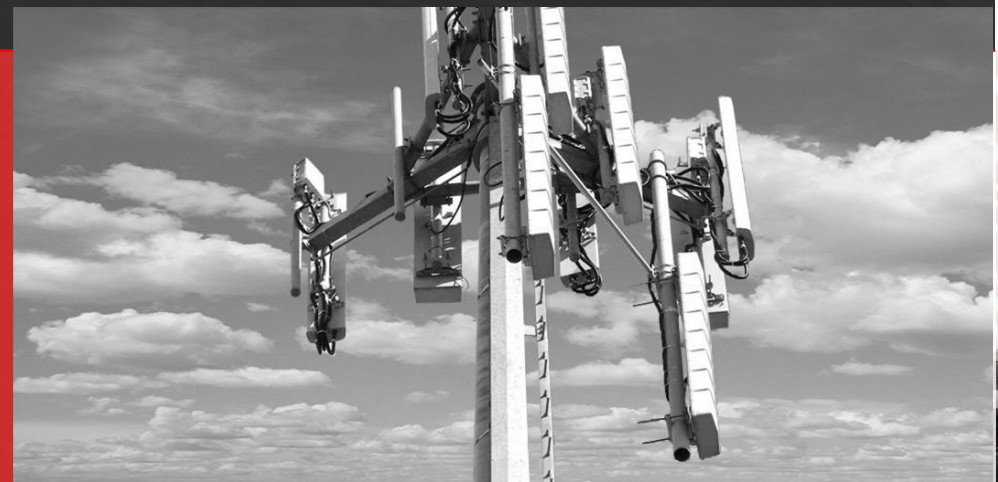

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO2012S-UHS	High Stability	3.3, 5	Clipped Sine	10 to 40	±0.100	-40 to +105	12.8 x 20.4 x 7.8



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Expanded Selection of Large Package TCXO : Temperature Compensated Crystal Oscillator (1 to 800 MHz)

Dynamic Engineers offers an extensive lineup of legacy TCXO package configurations with a wide range of options such as:

- 9 x11 mm SMD to full 14-pin DIP leaded package of 13 x 20 mm
- 1 to 800 MHz operating frequencies
- Clipped sine, 50 ohm full sine wave, CMOS, LVDS, and LVPECL output

These TCXO's are designed for a diverse global customer base and application spectrum. Standard technologies such as phase noise, short term stability, or non-standard frequencies can be tailored to customer specific requirements. We provide value to our customers by offering the latest in both technology and design, as well as legacy packages which may no longer be available from our competitors.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO1313LCS1	Standard	3.3	Clipped Sine	10 to 50	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LCS2	Standard	5	Clipped Sine	10 to 50	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LS1	Standard	3.3	Sine	10 to 50	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LS2	Standard	5	Sine	10 to 50	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LSQ1	Standard	3.3	CMOS	6 to 190	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LSQ2	Standard	5	CMOS	6 to 190	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LP1	Standard	3.3	LVPECL	1 to 800	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LP2	Standard	5	LVPECL	1 to 800	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LD1	Standard	3.3	LVDS	1 to 800	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO1313LD2	Standard	5	LVDS	1 to 800	±0.5	-40 to +85	12.7 x 12.7 x 5.1
TCXO2013LCS1	Standard	3.3	Clipped Sine	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LCS2	Standard	5	Clipped Sine	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

CONTACT US :

www.DynamicEngineers.com
 Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Expanded Selection of Large Package TCXO : Temperature Compensated Crystal Oscillator (1 to 800 MHz)

Dynamic Engineers offers an extensive lineup of legacy TCXO package configurations with a wide range of options such as:

- 9 x11 mm SMD to full 14-pin DIP leaded package of 13 x 20 mm
- 1 to 800 MHz operating frequencies
- Clipped sine, 50 ohm full sine wave, CMOS, LVDS, and LVPECL output

These TCXO's are designed for a diverse global customer base and application spectrum. Standard technologies such as phase noise, short term stability, or non-standard frequencies can be tailored to customer specific requirements. We provide value to our customers by offering the latest in both technology and design, as well as legacy packages which may no longer be available from our competitors.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
TCXO2013LS1	Standard	3.3	Sine	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LS2	Standard	5	Sine	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LSQ1	Standard	3.3	CMOS	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LSQ2	Standard	5	CMOS	6 to 190	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LP1	Standard	3.3	LVPECL	1 to 800	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LP2	Standard	5	LVPECL	1 to 800	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LD1	Standard	3.3	LVDS	1 to 800	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO2013LD2	Standard	5	LVDS	1 to 800	±0.5	-40 to +85	13.1 x 20.7 x 7.5
TCXO119ZCST1	Standard	3	Clipped Sine	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO119ZCST2	Standard	3.3	Clipped Sine	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO119ZCST3	Standard	5	Clipped Sine	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO119ZCLK1	Standard	3	CMOS	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO119ZCLK2	Standard	3.3	CMOS	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO119ZCLK3	Standard	5	CMOS	9.6 to 50	±1	-40 to +85	9.6 x 11.4 x 1.9
TCXO914ZCLK1	Standard	3.3	CMOS	5 to 200	±0.5	-40 to +85	9 x 14 x 5
TCXO914ZCLK2	Standard	5	CMOS	5 to 200	±0.5	-40 to +85	9 x 14 x 5
TCXO2013ZS1	Standard	3.3	Sine	10 to 200	±0.5	-40 to +85	13 x 20 x 6
TCXO2013ZS2	Standard	5	Sine	10 to 200	±0.5	-40 to +85	13 x 20 x 6



Dynamic Engineers, Inc.

TCXO : Temperature Compensated

Extended Temperature Range XO : Clock Crystal Oscillator (-55 to +125 °C)

Dynamic Engineers' state-of-the-art extended temperature XO, the XO3225S series, is designed for harsh environments such as oil drilling, geothermal, or industrial instrumentation, with features like:

- Extended operating temperature range from -55 to +125°C
- Low jitter and phase noise typical at 25 picoseconds Pk-Pk period jitter
- 1.8V, 2.5V or 3.3V voltage options
- Tight symmetry of 45% to 55% available



Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
XO3225S-ET	Extended Temp	1.8, 2.5, 3.3	CMOS	1.25 to 100	±50	-55 to +125	2.5 x 3.2 x 1
XO2520S-ET	Extended Temp	1.8, 2.5, 3.3	CMOS	1.25 to 100	±50	-55 to +125	2 x 2.5 x 1
XO3225SLP1-ET	Extended Temp	2.5	LVPECL	10 to 250	±50	-40 to +125	2.5 x 3.2 x 0.9
XO3225SLP2-ET	Extended Temp	3.3	LVPECL	10 to 250	±50	-40 to +125	2.5 x 3.2 x 0.9
XO3225SLD1-ET	Extended Temp	2.5	LVDS	10 to 250	±50	-40 to +125	2.5 x 3.2 x 0.9
XO3225SLD2-ET	Extended Temp	3.3	LVDS	10 to 250	±50	-40 to +125	2.5 x 3.2 x 0.9

Extreme Temperature Range XO : Clock Crystal Oscillator (-100 to +300 °C)

Dynamic Engineers strives to provide High-Reliability solutions to meet all XO needs. Our extreme temperature XOs are capable of operating in the range of -100 to +300°C as well as being resistant to shock and vibration for use in extreme temperature environments. They are available in a broad selection of supply voltages, frequency ranges, and packaging options.



Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
ETXO3225I	Extreme Temp	1.8 to 5.5	CMOS	0.032768	±300	-55 to +150	3.2 x 2.5 SMD
ETXO7500I	Extreme Temp	1.8 to 5.5	CMOS	80 (max)	±60 to ±250	-100 to +240	5.0 x 7.2 SMD
ETXOI-A	Extreme Temp	1.2 to 18	CMOS	110 (max)	±100, ±250, ±300	-100 to +300	12.95 x 12.95 Half-Dip Leaded
ETXOI-B	Extreme Temp	1.2 to 18	CMOS	110 (max)	±100, ±250, ±300	-100 to +300	12.83 x 22.35 Full-Dip Leaded
ETXOI-C	Extreme Temp	1.2 to 18	CMOS	110 (max)	±100, ±250, ±300	-100 to +300	6.60 height 8-pin TO-5 leaded
ETXOI-D	Extreme Temp	1.2 to 18	CMOS	110 (max)	±100, ±250, ±300	-100 to +300	4.45 height 8-pin TO-5 leaded



Dynamic Engineers, Inc.

XO : Clock Crystal Oscillator

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

Lowest Jitter XO (Integrated Phase Jitter in Femto-seconds)

Dynamic Engineer's outstanding clock oscillator technology incorporates the latest low noise oscillator IC architecture, and advanced low noise crystal processing breakthroughs to deliver:

- RMS phase jitter as low as 48 femto-seconds integrated over 12 KHz to 20 MHz
- Phase noise performance of -166 dBc/Hz @ 100 KHz and -171 dBc/Hz @ 1 MHz offset

This extreme low phase jitter XO is best suited to serve as the clock reference for high performance D/A conversion in the highest quality digital audio systems where outstanding timing resolution is key.



Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
XO3225AJSQ1	Low Phase Noise	1.8	CMOS	10 to 50	±25	-40 to +85	2.5 x 3.2 x 1
XO3225AJSQ2	Low Phase Noise	2.5	CMOS	10 to 50	±25	-40 to +85	2.5 x 3.2 x 1
XO3225AJSQ3	Low Phase Noise	3.3	CMOS	10 to 50	±25	-40 to +85	2.5 x 3.2 x 1
XO5300AJSQ1	Low Phase Noise	1.8	CMOS	10 to 50	±25	-40 to +85	3.2 x 5 x 1.2
XO5300AJSQ2	Low Phase Noise	2.5	CMOS	10 to 50	±25	-40 to +85	3.2 x 5 x 1.2
XO5300AJSQ3	Low Phase Noise	3.3	CMOS	10 to 50	±25	-40 to +85	3.2 x 5 x 1.2
XO7500AJSQ1	Low Phase Noise	1.8	CMOS	10 to 50	±25	-40 to +85	5 x 7 x 1.4
XO7500AJSQ2	Low Phase Noise	2.5	CMOS	10 to 50	±25	-40 to +85	5 x 7 x 1.4
XO7500AJSQ3	Low Phase Noise	3.3	CMOS	10 to 50	±25	-40 to +85	5 x 7 x 1.4



Dynamic Engineers, Inc.

XO : Clock Crystal Oscillator

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Expanded Selection of Standard Package XO

Dynamic Engineers' state-of-the-art XO pushes the technology envelope in clock oscillator technology by offering supply voltages down to 1.8V, and package sizes as small as 1.6 x 2.0 mm. Ultra-compact quartz crystal resonator blank research continues to allow further reductions in overall package size without sacrificing long term reliability.



Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
XO2016Z1	Standard	1.8	CMOS	0.75 to 80	±25	-40 to +85	1.6 x 2 x 1
XO2016Z2	Standard	2.5	CMOS	0.75 to 80	±25	-40 to +85	1.6 x 2 x 1
XO2016Z3	Standard	3.3	CMOS	0.75 to 80	±25	-40 to +85	1.6 x 2 x 1
XO2520Z1	Standard	1.8	CMOS	1 to 80	±25	-40 to +85	2 x 2.5 x 1
XO2520Z2	Standard	2.5	CMOS	1 to 80	±25	-40 to +85	2 x 2.5 x 1
XO2520Z3	Standard	3.3	CMOS	1 to 80	±25	-40 to +85	2 x 2.5 x 1
XO3225Z1	Standard	1.8	CMOS	0.03 to 133	±10	-40 to +85	2.5 x 3.2 x 1.2
XO3225Z1	Standard	2.5	CMOS	0.03 to 133	±10	-40 to +85	2.5 x 3.2 x 1.2
XO3225Z1	Standard	3.3	CMOS	0.03 to 133	±10	-40 to +85	2.5 x 3.2 x 1.2
XO5300ZLP1	Standard	2.5	LVPECL	20 to 212.5	±50	-40 to +85	3.2 x 5 x 1.3
XO5300ZLP2	Standard	3.3	LVPECL	20 to 212.5	±50	-40 to +85	3.2 x 5 x 1.3
XO5300ZLD1	Standard	2.5	LVDS	20 to 212.5	±50	-40 to +85	3.2 x 5 x 1.3
XO5300ZLD2	Standard	3.3	LVDS	20 to 212.5	±50	-40 to +85	3.2 x 5 x 1.3



Dynamic Engineers, Inc.

XO : Clock Crystal Oscillator

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Lowest Jitter VCXO : Voltage Controlled Crystal Oscillator

Dynamic Engineers continues to invest in new IC technology in order to offer lowest jitter performing VCXO devices in smaller package footprints. Our line of differential output VCXOs comes in an 8-pad 3.2 x 5.0 mm ceramic carrier. World class integrated phase jitter can be achieved for LVDS and LVPECL outputs up to an operating frequency of 2.1 GHz.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
VCXO5300AJLP1	Low Phase Noise	2.5	LVPECL	15 to 2100	±25	-40 to +85	3.2 x 5 x 1.3
VCXO5300AJLP2	Low Phase Noise	3.3	LVPECL	15 to 2100	±25	-40 to +85	3.2 x 5 x 1.3
VCXO5300AJLD1	Low Phase Noise	2.5	LVDS	15 to 2100	±25	-40 to +85	3.2 x 5 x 1.3
VCXO5300AJLD2	Low Phase Noise	3.3	LVDS	15 to 2100	±25	-40 to +85	3.2 x 5 x 1.3

SMA Output Connector VCXO : Voltage Controlled Crystal Oscillator

Dynamic Engineers offers SMA Output Connector VCXOs with ruggedized package design for harsh environment microwave Local Oscillator (LO) modules up to 1500 MHz. One of our designs offers very wide pulling of ±1500 ppm minimum by utilizing special crystal materials with unique properties.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
VCXO5440LULN1-SMA	Low Phase Noise	12	Sine	300 to 1300	±50	-40 to +85	40 x 54 x 19
VCXO5440LWP-SMA	Wide Pull	12	Sine	500 to 1500	±20	-40 to +85	40 x 54 x 19



Dynamic Engineers, Inc.

VCXO : Voltage Controlled

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Expanded Selection of Standard Package VCXO : Voltage Controlled Crystal Oscillator

Dynamic Engineers continues to enhance its VCXO portfolio with upgraded performance in smaller packages.

Model	Device Type	Power Supply	RF Output	Frequency Range (MHz)	Frequency Stability (ppm)	Operating Temperature (°C)	Package (mm)
VCXO5300ZLP1	Standard	2.5	LVPECL	60 to 175	±50	-40 to +85	3.2 x 5 x 1.3
VCXO5300ZLP2	Standard	3.3	LVPECL	60 to 175	±50	-40 to +85	3.2 x 5 x 1.3
VCXO5300ZLD1	Standard	2.5	LVDS	60 to 175	±50	-40 to +85	3.2 x 5 x 1.3
VCXO5300ZLD2	Standard	3.3	LVDS	60 to 175	±50	-40 to +85	3.2 x 5 x 1.3
VCXO914ZLP1	Standard	2.5	LVPECL	100 to 800	±50	-40 to +85	9 x 14 x 5.5
VCXO914ZLP2	Standard	3.3	LVPECL	100 to 800	±50	-40 to +85	9 x 14 x 5.5
VCXO914ZLD1	Standard	2.5	LVDS	100 to 800	±50	-40 to +85	9 x 14 x 5.5
VCXO914ZLD2	Standard	3.3	LVDS	100 to 800	±50	-40 to +85	9 x 14 x 5.5



Dynamic Engineers, Inc.


VCXO : Voltage Controlled

Timing Module

Dynamic Engineers new line of timing modules. The ultra low power clock module TM3934CJ-LP-16.384MHz-A can be used as a PPS time keeper in all highly battery-constraint underwater systems. The module will automatically adjust the OCXO frequency and phase to the external PPS reference (under GNSS) with an record high precision at 10-11 leve (0.02ppb)

Meanwhile, the low aging high performance low power timing module TM3934CJ-HP-10MHz-A, with its core low aging and low power consumption, is ideal for all applications with drastic precision timing constraints under GNSS denied area. This model can be used in precision timing server, GNSS receiver, portable communication receiver and portable test instrument reference.

Model	Frequency (MHz)	Output	Power Consumption at 25°C (mW typ)	Aging after 30 days (ppb/day typ)	Notes
TM3934CJ-LP-16.384MHz-A	16.384	HCMOS	65	±2.0	Pin to pin compatible replacement
TM3934CJ-HP-10MHz-A	10.000	50ohm Sinewave	550	±0.2	Hold over stability: 2.5us typ at 25°C over 24h

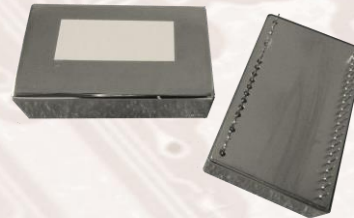

Dynamic Engineers, Inc.

Timing Module

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
TEL: (+1) 281-870-8822

Custom GHz Frequency Source Modules

Manufacturers or users of phased array antenna systems must be able to set up their test systems using phase coherent Local Oscillators (LO) for proper measurements and antenna simulations. DEI custom GHz frequency source modules can be used to test and simulate multiple high frequency receiver systems, where the receivers must have an equivalent I.O source instead of independent LO sources.

Unique features of our GHz frequency source modules include:

- Internal ultra-low phase noise reference OCXO
- Customizable frequency source
- 1 direct OCXO output and 2 user definable outputs (multiplied / synthesized)
- Phase coherent output



For the OCXO6060L platform:

- RF1 ranges from 50 to 160 MHz
- RF2 ranges from 600 to 1600 MHz
- RF3 ranges from 1200 to 3200 MHz

For the PLOCXO7070L platform:

- RF1 ranges from 50 to 160 MHz
- RF2 ranges from 300 to 1300 MHz
- RF3 ranges from 300 to 3000 MHz
- The PLOCXO7070L phase locks to an external FREF (RF IN)

Phase Locked PLXOs & GHz TCXOs


PLXO5050L:

- Frequency Range: 3 to 12 GHz
- Phase Noise (typ): -120 dBc/Hz at 100 KHz offset
- Output Type: Sine Wave



TCXO5440L:

- Frequency Range: 300 to 1300 MHz
- Frequency Stability: up to ± 0.5 ppm over -40 to +85°C
- Output Type: Sine Wave



Dynamic Engineers, Inc.


GHz Frequency Source Module

Custom Crystal Filters : Narrow Band

Dynamic Engineers offers a wide selection of quartz crystal filters in custom leaded or surface mount packages. All critical components used in the filter assembly are manufactured in house utilizing a vertical integration process. Our operation has a full service machine shop to handle all product packaging needs. The most critical component of the filter design, the filter crystals, are designed and manufactured in another part of the building. The combination of crystal and filter manufacturing in the same facility enables us to meet stringent global quality and reliability standards.

Model	Center Frequency (MHz)	Passband (\pm KHz)	Passband Attenuation (dB)	Stopband (\pm KHz)	Stopband Attenuation (dB)	Package (mm)
XF-3	9	2.8	6	10	50	41.7 x 19.3
XF-6	12.5	10.5	3	28	60	41.5 x 16.2
XF-7	17	25	3	62.5	30	25.4 x 15.8
XF-8	20	1.8	6	20	70	57.2 x 19.5
XF-9	27.021	2.5	3	10	30	50.3 x 17.2
XF-10	32.768	3.8	6	16	40	28 x 15.2
XF-11	40.04	10.5	3	40	50	23.6 x 15.3
XF-13	56.96	16	1	85	30	38 x 25
XF-16	70.25	12.5	1	110	45	32 x 12.7
XF-17	75	11	6	100	40	36 x 13
XF-19	109.35	5	1	45	50	36 x 11.5
XF-20	141.558	8	3	50	40	43.2 x 16.5

Custom Crystal Filters : Wide Band



Model	Center Frequency (MHz)	Passband (\pm KHz)	Passband Attenuation (dB)	Stopband (\pm KHz)	Stopband Attenuation (dB)	Package (mm)
XF-2	4.3	20	6	35	60	22.5 x 42
XF-12	43.5	180	1	430	40	16.5 x 38
XF-14	69.5	175	3	500	20	12.7 x 32
XF-15	70	100	3	200	28	15.5 x 39
XF-18	94.05	65	3	450	50	19 x 56
XF-21	21.4	100	3	200	35	16.5 x 36
XF-22	21.4	38	6	100	60	16.5 x 36
XF-23	21.4	68	6	170	60	16.5 x 36



Dynamic Engineers, Inc.


Custom Crystal Filter

Ultra Narrow Band Crystal Filter

Dynamic Engineers latest ultra narrow band crystal filters offers high frequency in a compact package. The passband of $\pm 700\text{Hz}$ for 50MHz frequency is best suited for 5G communication and wireless communication system

Model	Center Frequency (MHz)	Passband Width @ -3db (Hz max)	Stopband @ $F_o \pm 5\text{KHz}$ (db)	Package (mm)
DEI5748-50MHz	50	± 700	40	25.1 x 14.1 x 6.5
DEI5748-1-50MHz	50	± 700	40	25.1 x 14.1 x 10.2

Note: Wide Variety of custom package sizes available

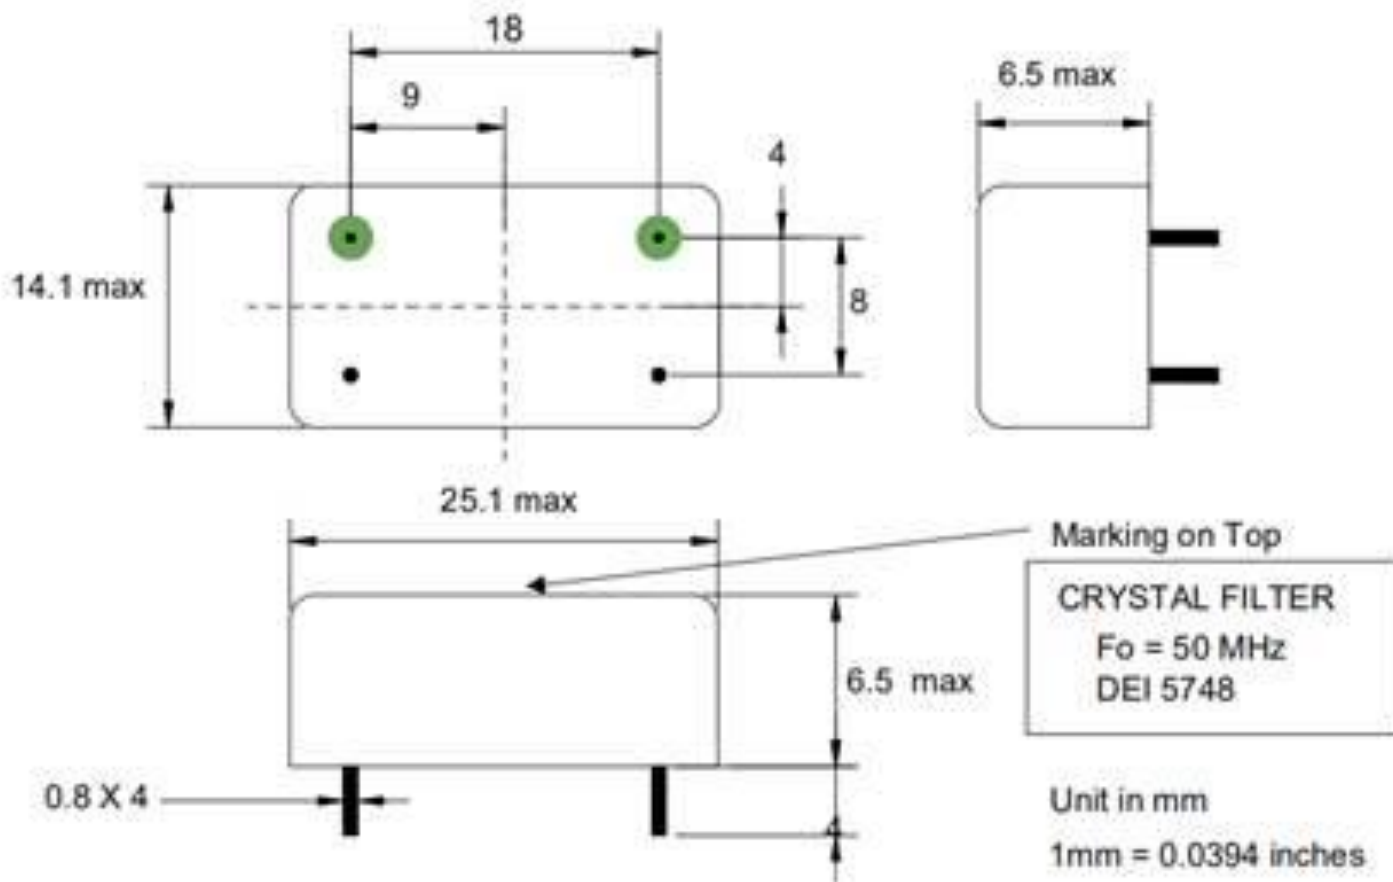

Dynamic Engineers, Inc.

Ultra Narrow Band Crystal Filter

CONTACT US :
www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

Custom LC Filter Design (Frequencies up to 6 GHz)

Dynamic Engineers offers a wide selection of LC filters up to 6 GHz in custom leaded or surface mount packages. The most critical component of the LC filter design, the filter coils, are assembled by hand internally. The combination of critical lumped element and filter manufacturing in the same facility enables us to meet stringent global quality and reliability standards for LC filter performance.



Model	Center Frequency (MHz)	Passband (+/- MHz)	Passband Attenuation (dB)	Stopband (+/- MHz)	Stopband Attenuation (dB)	Package (mm)
LCF1000	21.400	0.500	3	2	60	44.5 x 16.0
LCF1001	113.000	5	3	78 to 165	50	36.8 x 12.7
LCF1002	220.000	25	0.6	280 to 1000	40	22.9 x 10.2
LCF1003	125.000	5	3	250	60	22.9 x 10.2
LCF1005	400 to 470	400 to 470	0.5	800 to 900	50	135.0 x 25.0

Note: Wide Variety of custom package sizes available

Tunable LC Filter (Frequencies from 225 to 512 MHz)

The TLCF-225-512MHz-A is a tunable LC filter module that can reduce co-site interference in the transmitting function and increase receiver sensitivity by filtering out of band unwanted signals. Standard technologies such as frequency ranges and bandwidths can be tailored to customer specific requirements upon request.



- Tuning Speed: Less than 10 μ s maximum
- Ideal for use in portable small cell and radar applications
- Frequency Range: 225 MHz to 512 MHz in 250 channels
- Operating Temperature: -45 to +80°C




Dynamic Engineers, Inc.

Custom LC Filter

Filter Bank Module (Frequencies from 30 to 512 MHz)

Dynamic Engineers' comprehensive line of Filter Bank Modules, the BFM3364 series, operate in a frequency range of 30 to 512 MHz which can be used both in Transmitting and Receiving mode. In Transmitting mode, the BFM3364 works as a 6 Channel Harmonic Filter where each band is selected automatically with a PIN Diode switch. In Receiving mode the module operates as a Gain Block providing High Linearity and Low Noise operation.

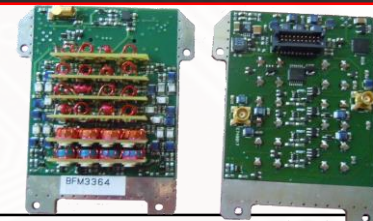

Frequency Range	30 to 512 MHz					
Frequency Bands	CH1 : 30-50 MHz CH2 : 50-80 MHz CH3 : 80-140 MHz CH4 : 140-227 MHz CH5 : 227-400 MHz CH6 : 400-512 MHz					
$Z_{in} = Z_{out}$	50 Ω					
Insertion Loss	2.5 db max. 1.8 db typical					
VSWR	1.5 : 1					
Attenuation (reference is made to F_{min} of each selected channel)	CH1	CH2	CH3	CH4	CH5	CH6
2* F_{min}	> 24 db	> 27 db	> 26 db	> 28 db	> 24 db	> 35 db
3* F_{min}	> 33 db	> 45 db	> 43 db	> 46 db	> 43 db	> 51 db
4* F_{min}	> 40 db	> 50 db	> 45 db	> 50 db	> 41 db	> 56 db
5* F_{min}	> 45 db	> 50 db	> 45 db	> 50 db	> 48 db	> 45 db
RF Power Handling	8 W (10 W max.)					
Switch Time	Switch time 50 μ sec max.					
Operating Temperature Range	-30 to +60°C					
Supply Voltage: V1 V2	3.3 V (5 V max.) 18 to 20 V (25 V max.)					
DC Current: I1 (I_{cc} at V1) I2 (I_{cc} at V2)	280 mA 10 mA					



Dynamic Engineers, Inc.

Custom LC Filter

CONTACT US :

www.DynamicEngineers.com
 Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

VCO : Voltage Controlled Oscillator

Dynamic Engineers offers a wide array of VCO designs in the industry standard 12.7 x 12.7 mm footprint. Critical performance parameters such as tuning sensitivity (MHz/volt), and phase noise can be measured as a function of operating temperature and min/max. tuning voltage. Customer specific requirements are also welcome if a matching device cannot be found amid our extensive design offerings.

Model	Frequency Range (MHz)	Power Output (dBm)	Tuning Voltage (Vdc)	Tuning Sensitivity (MHz/V)	2 nd Harmonic (dBc)	Supply Voltage (Vdc)	Current (mA)	Phase Noise @ 10 kHz (dBc/Hz)
VCO50-100	50 to 100	9.5	1-15	4.5	-18	5	20	-109
VCO135-185	135 to 185	5	1.5-10	9	-18	11	20	-110
VCO200-400	200 to 400	11	1-16	16	-10	5	18	-104
VCO376-410	376 to 410	3	0.5-4.5	13	-15	5	15	-118
VCO540-560	540 to 560	2.5	1-4	14	-13	5	16	-110
VCO736-760	736 to 760	0	0.5-4.5	13	-20	5	25	-115
VCO800-956	800 to 956	3	0.4 - 4.7	47	-18	4.3	25	-105
VCO1000-1100	1000 to 1100	11	0.5-4.5	37	-20	5	29	-112
VCO1248	1248	7	0.5-4.5	3.5	-20	5	24	-125
VCO1330-1350	1330 to 1350	5	0.5-5.0	35	-27	5	21	-100
VCO1400-2400	1400 to 2400	3	1-16	90	-20	5	21	-98
VCO1510-1650	1510 to 1650	0	1.5-12	24	-25	8	15	-107
VCO1640-1700	1640 to 1700	2.5	0.5-4.5	30	-21	5	23	-111
VCO1700-1800	1700 to 1800	7	0.5-4.5	35	-15	5	20	-110
VCO1800-1900	1800 to 1900	0	0.5-4.5	40	-30	5	27	-107
VCO1850-2050	1850 to 2050	5	1-14	30	-18	6	27	-107
VCO1950-2350	1950 to 2350	7	0-10	60	-15	10	17	-101
VCO3200	3200	6	1-10	7	-25	8	25	-114



Dynamic Engineers, Inc.

VCO : VOLTAGE CONTROLLED OSCILLATOR

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

VCO : Voltage Controlled Oscillator

Dynamic Engineers offers a wide array of VCO designs in the industry standard 12.7 x 12.7 mm footprint. Critical performance parameters such as tuning sensitivity (MHz/volt), and phase noise can be measured as a function of operating temperature and min/max. tuning voltage. Customer specific requirements are also welcome if a matching device cannot be found amid our extensive design offerings.

Model	Frequency Range (MHz)	Power Output (dBm)	Tuning Voltage (Vdc)	Tuning Sensitivity (MHz/V)	2 nd Harmonic (dBc)	Supply Voltage (Vdc)	Current (mA)	Phase Noise @ 10 kHz (dBc/Hz)
VCO2000	2000	6	0.5-4.5	6	-25	6	28	-122
VCO2100-2200	2100 to 2200	0	0.5-4.5	36	-20	5	26	-106
VCO2137-2498	2137 to 2498	9	1-20	60	-10	10	40	-106
VCO2200-2300	2200 to 2300	0	0.5-4.5	36	-20	5	26	-106
VCO2310	2310	7	0.5-4.5	7	-15	6	28	-120
VCO2436-2590	2436 to 2590	2	1-11	19	-15	12.5	29	-112
VCO2525-2800	2525 to 2800	5	1-12	35	-20	6	27	-107
VCO2580	2580	7	1-10	4	-20	8	27	-120
VCO2652-3218	2652 to 3218	0	3-16	55	-15	5	24	-98
VCO2800-3400	2800 to 3400	7	2-20	65	-10	8	31	-85
VCO2960-3032	2960 to 3032	3	0.5-4.5	33	-20	5	27	-105
VCO3200	3200	6	1-10	7	-25	8	25	-114
VCO4680-4720	4680 to 4720	5	0-10	9	-36	5	20	-100



Dynamic Engineers, Inc.

VCO : VOLTAGE CONTROLLED OSCILLATOR

CONTACT US :

www.DynamicEngineers.com
Inquiry@DynamicEngineers.com
 TEL: (+1) 281-870-8822

NOTES:

Contact Us

Headquarters in Houston, Texas

Phone: (+1) 281-870-8822

Email: Inquiry@DynamicEngineers.com

Address: 2550 Gray Falls Dr., Houston, TX, 77077



DISCLAIMER:

This brochure represents a sampling of available models. Please consult our sales department or visit us online for more detailed and complete listings of our products. All products are subject to US Export Regulations.



Dynamic Engineers, Inc.

Contact Info, Notes, Disclaimer