



# Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA  
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

89 → ++ !&% ( A < n  
G F È T P : Ô Ì ° • ç Á Ò Á

## Features and Benefits

Center Frequency (Fo)	21.4 MHz
Passband Width @ -3 dB	+/- 12.5 KHz min
Passband Width @ -1 dB	+/- 10 KHz min
Ripple	1.5 dB max
Insertion Loss	4.0 dB max
Stopband Width @ +/- 30KHz	-70dB min
Input Power	+3 dBm(operative)/+10 dBm(Damage)
Ultimate attenuation	80dB min
Impedance Zin = Zout	50 Ohm

## Operating Temperature



-40°C to +85°C

## Storage Temperature

-50°C to +85°C

## Mechanical Drawing & Pin Connections

Drawing No: A8 &&\$\$\$&!%

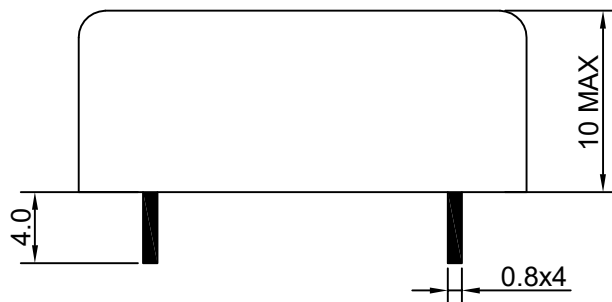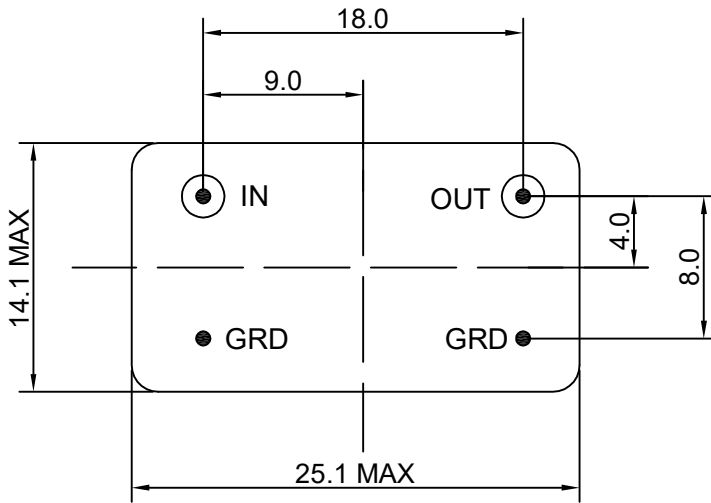

Unit in mm  
1mm = 0.0394 inches