



Electrical Specifications

| | |
|------------------------------------|---------------------------------------|
| Center Frequency (F ₀) | 28.012 MHz+/-2KHz |
| Passband Width @ -3 dB | +/- 10 KHz +/- 4 KHz |
| Ripple | +/- 1.0 dB max |
| Insertion Loss | 5 dB max |
| Stopband Width | 70 dB min @ F ₀ +/- 30 KHz |
| Input Level | -5dBm to +5dBm |
| Spurious | 60dB min |
| Impedance Zin = Zout | 50 Ohms |

Operating Temperature



-40°C to +85°C

Storage Temperature

-40°C to +90°C

Mechanical Drawing & Pin Connections

Drawing No : A8888888(!%

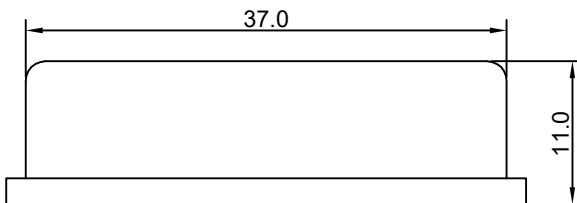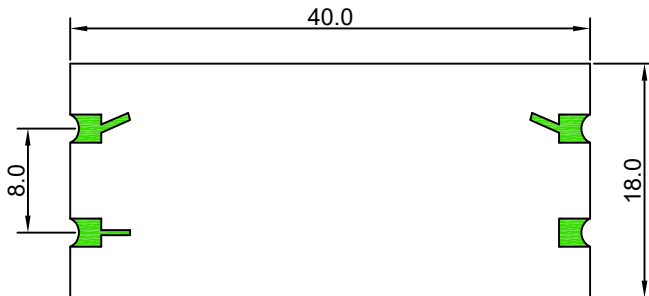

- Notes:
1. Tolerance ±0.2mm
 2. Hermetically sealed
 3. Pads 1.8x1.8mm

Unit in mm
1mm = 0.0394 inches