



### Electrical Specifications



Center Frequency (Fo)	10.7 MHz
Passband Width @ -3 dB	+/- 100 KHz min
Ripple	2.0 dB max
Insertion Loss	4.0 dB max
Stopband With @ - 60 dB	+/- 300 KHz max
Input Power	0dBm max
Spurious	40dB mim
Impedance Zin = Zout	50 Ohms

### Operating Temperature

-30°C to +70°C

### Mechanical Drawing & Pin Connections

Drawing No : MD230018-2

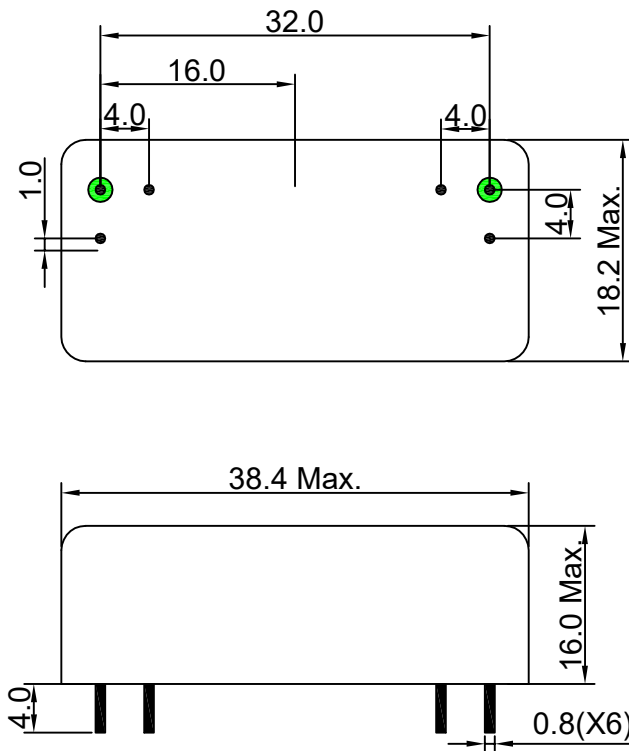

Unit in mm  
1mm = 0.0394 inches