



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

: 6 % \$ * \$ 6 5 ! % , A < n ! (\$ \$ A < n ! 5

í CH Filter Bank

Features

- High Performance
- High Reliability
- í CH Filter Bank

Specifications


Á

ITEM	Specification	
Pass Band Frequency	108~400 MHz	
Pass Band Frequency	CH1	108~153 MHz
	CH2	153~175 MHz
	CH3	225~270 MHz
	CH4	267~313 MHz
	CH5	313~400 MHz
Insertion Loss	3.5dB Max.	
Ripple	± 1dB Max.	
Stop band attenuation	CH1	DC~102.6MHz 25dB 160.65~800MHz 25dB
	CH2	DC~145.35MHz 25dB 183.75~800MHz 25dB
	CH3	DC~213.75MHz 25dB 283.5~800MHz 25dB
	CH4	DC~253.65MHz 25dB 328.65~800MHz 25dB
	CH5	DC~297.35MHz 25dB 420~800MHz 25dB
Return Loss	15dB Min.	
Power Handling	60W Max.	
Power Supply	+5V /1.2A -110V/ 100mA	
Switching Speed	5us	
Switch controls	TTL	
Impedance	50 Ω Nominal	
Operating temperature	-40°C to +85°C	
Storage temperature	-55°C to +85°C	
Dimensions	150 x 60 x 30mm	
RF connectors	SMA (female)	
Color	Black color Epoxy coating	




Mechanical Drawing & Pin Connections

Drawing No: A 8 8 % \$ \$ \$ (! %

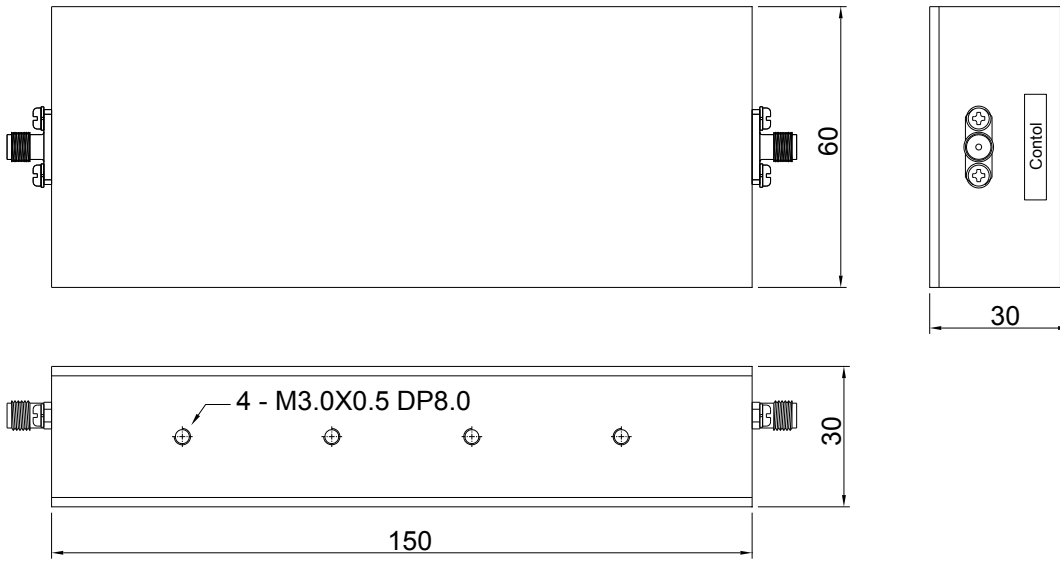


Unit in mm
1mm = 0.0394 inches


Simulation Result

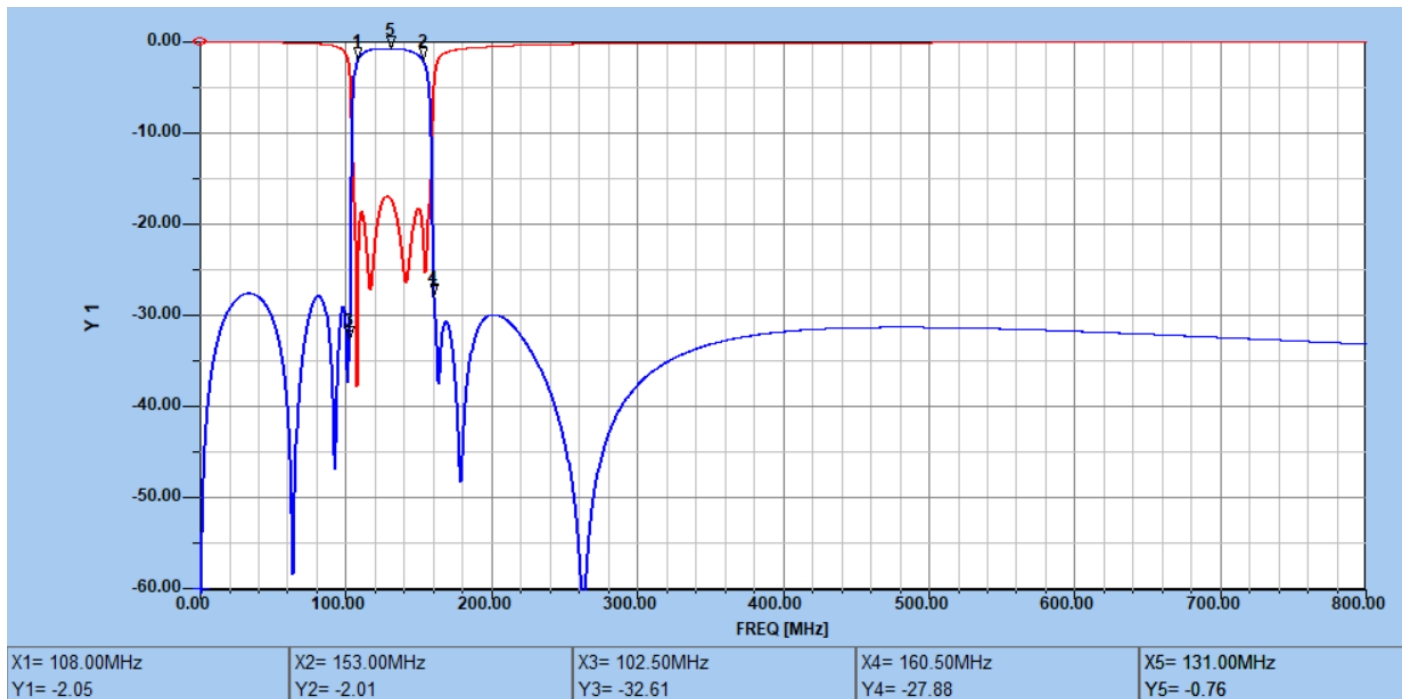


< Channel 1 >

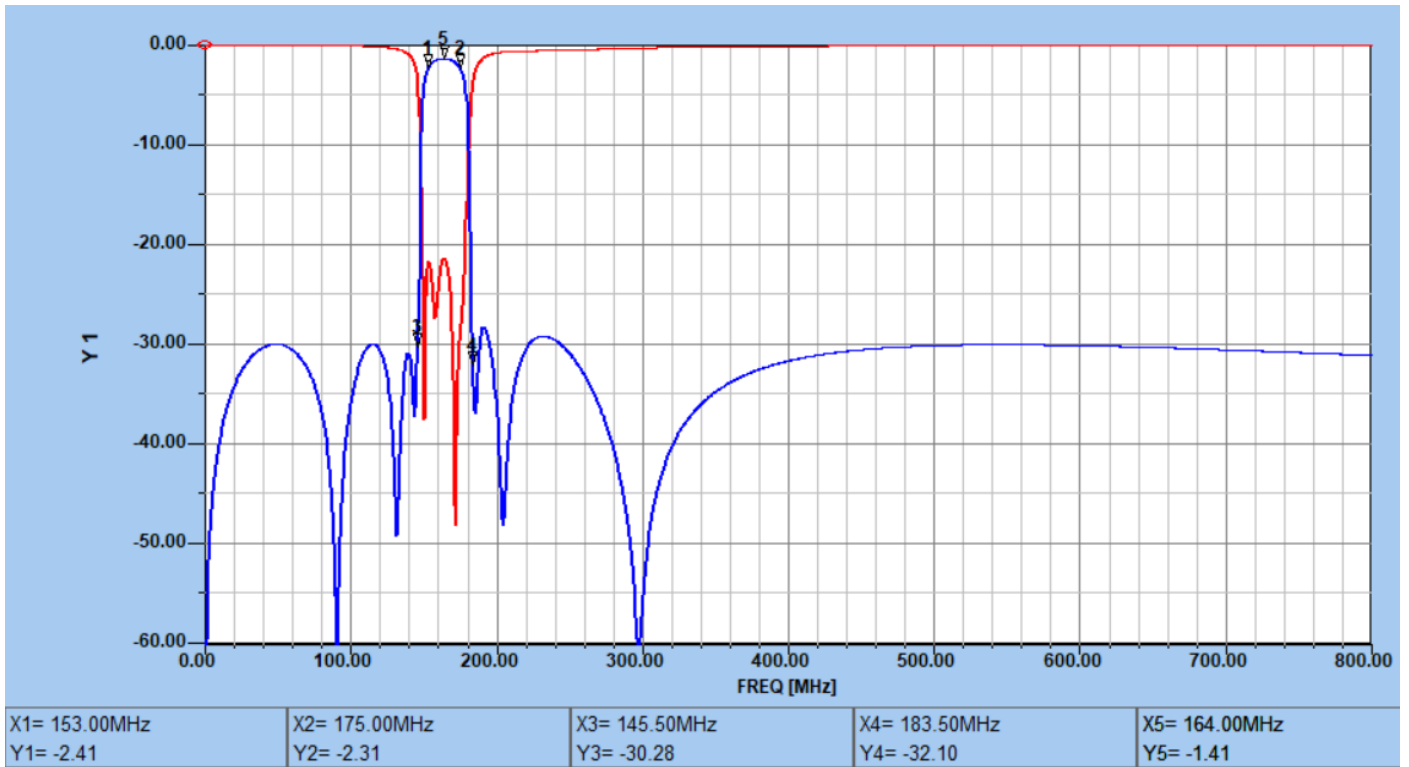


< Channel 2 >

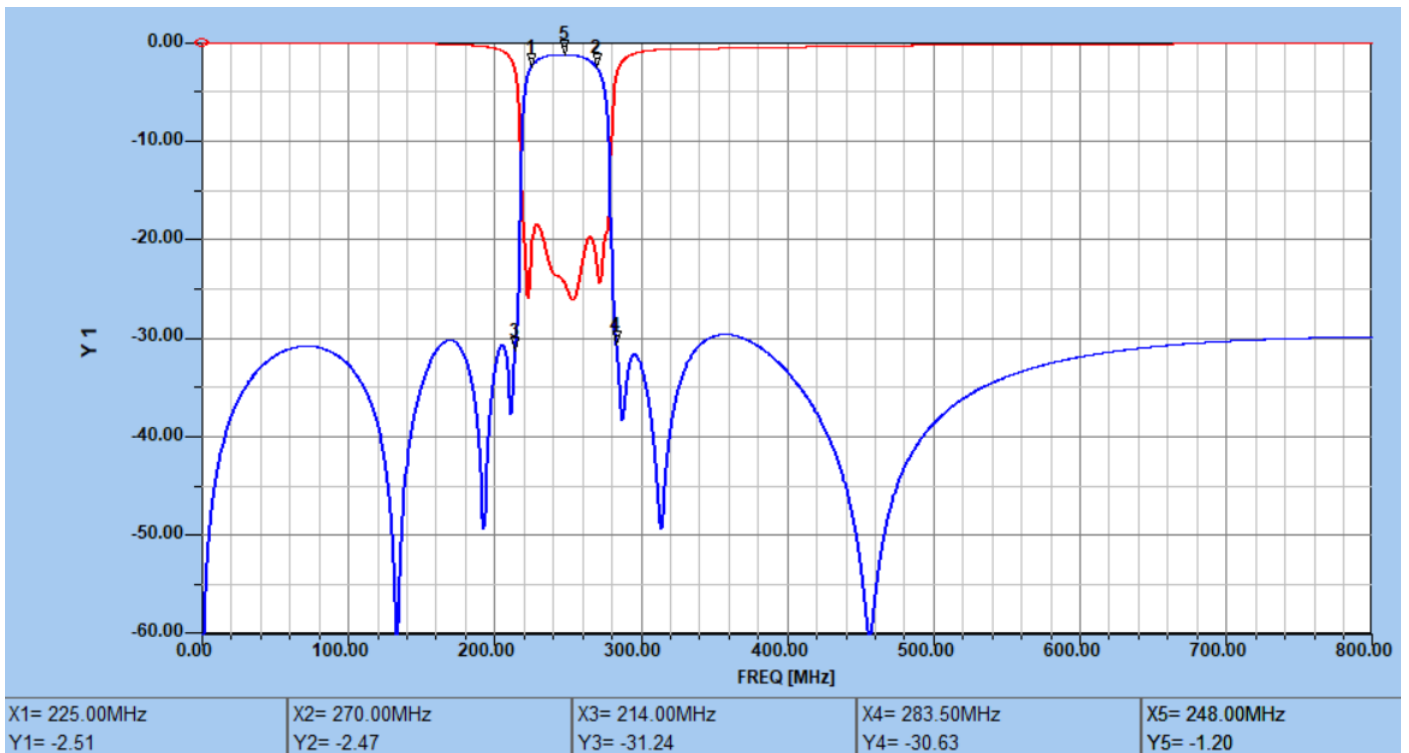

< Channel 3 >

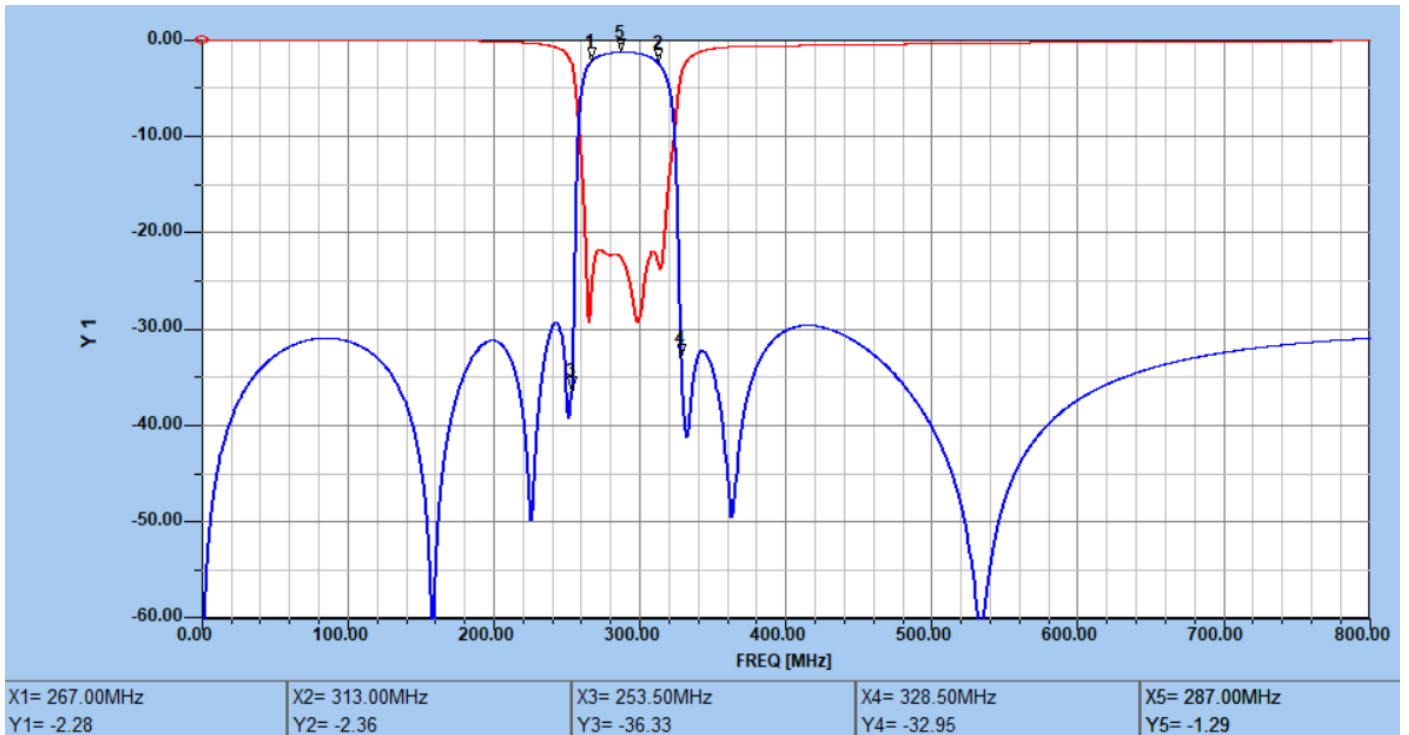

< Channel 4 >

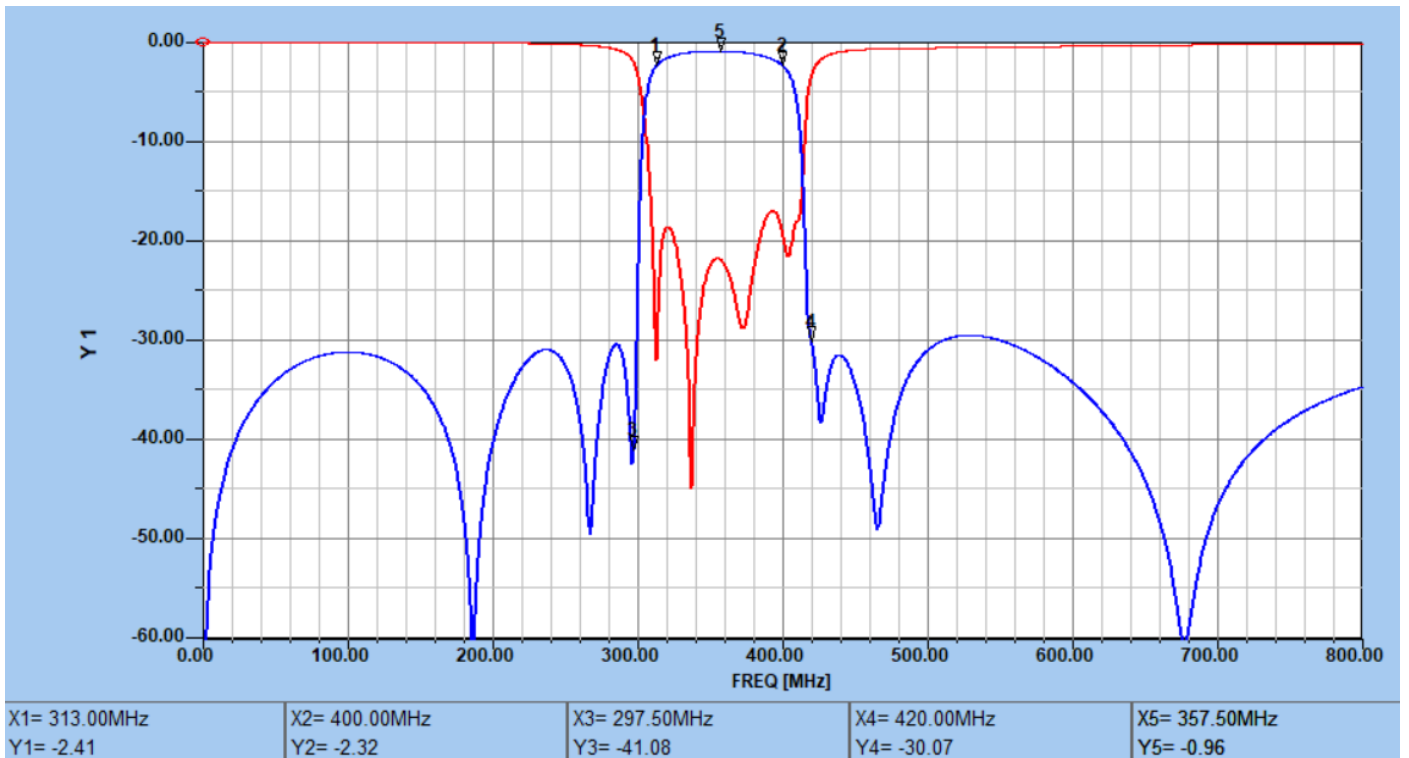

< Channel 5 >