



Features and Benefits

Very low phase noise up to -175 dBc/Hz, floor
High temperature stability up to ±1 ppb at -40°C to +85°C
Low aging up to ±0.2 ppb/day, 20 ppb/year
Compact surface mount design
Frequency range from 5 MHz to 150 MHz

Typical Applications


Stratum 3E clock systems
Cellular Base Station
Microwave Applications
Radar Reference
Instrumentation

Description

A new series of low phase-noise OCXO with high temperature stability for optimal performance.


Mechanical Drawing & Pin Connections

Drawing No:MD140083-1

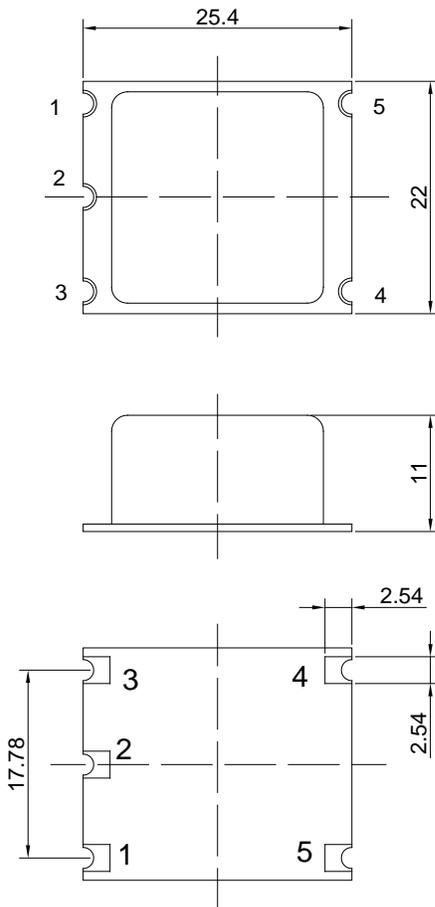

| Pin | Signal |
|-----|-------------------|
| 1 | Electrical tuning |
| 2 | Reference voltage |
| 3 | +V Supply |
| 4 | RF OUT |
| 5 | GND |

Unit : mm
1mm=0.0394inch

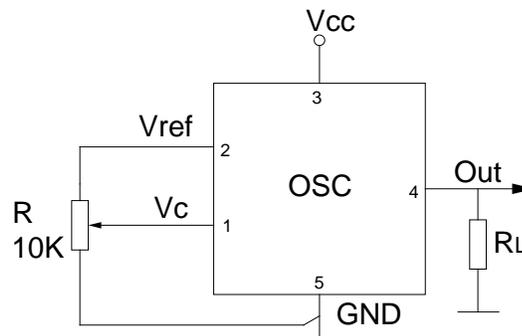

Note : 12.7mm height is available



Specifications

| General Specifications | | | | | | | |
|------------------------|------------------|-----------------------------------------------------|-----------------------------------------------------|------------|------------|------------|-------------------------------------------|
| Parameter | Sym | Condition | Value | | | Unit | Note |
| | | | Min. | Typ. | Max | | |
| Frequency Range | F ₀ | | 5 | | 150 | MHz | Fundamental operation |
| RF Output | | | | | | | |
| HCMOS (TTL) option | Load | | 10 | | 15 | kOhm pF | For 10 MHz operational frequency |
| | H-level voltage | V _H | V _{cc} =5V or 12V V _{cc} =3.3V | 3.8 2.4 | | V | |
| | L-level voltage | V _L | | | 0.4 | V | |
| | Duty Cycle | | | 45 | | 55 | % |
| | Rise / Fall Time | | | | | 10 | ns |
| Sine-wave option | Level | L | +6 | +8 | +10 | dBm | |
| | Load | R _L | | 50 | | Ohm | |
| | Harmonics level | | | | -30 | dBc | |
| Sub-harmonics level | | | None | | | dBc | |
| Frequency Control* | | | | | | | |
| Control Voltage Range | V _c | V _{cc} =5V or 12V V _{cc} =3.3V | 0 0 | | 4.2 2.8 | V | Positive tuning slope – (standard option) |
| Tuning Range | | | ±0.5 | ±1 | | ppm | |
| Reference voltage | V _{ref} | V _{cc} =5V or 12V V _{cc} =3.3V | 4.1 2.7 | 4.2 2.8 | 4.3 2.9 | V | |
| Frequency Stability | | | | | | | |
| Vs. temperature | | -40°C to +85°C, ref 25°C | | ±10 | | ppb | See chart below |
| Vs. supply voltage | | Ref V _{cc} typ. | | ±1 | | ppb | |
| Vs. acceleration | | Worst direction | ±0.5 | | ±1 | ppb/G | |
| Power Supply | | | | | | | |
| Voltage | V _{cc} | | 4.75 | 5.0 | 5.25 | V | 3.3V, 12V optional |
| Power Consumption | | Warm-up state Steady state, +25°C | | 3.2 1 | 3.5 1.2 | W W | |
| Warm-up time | t _{up} | to Δf/f = 1e-7, at +25°C | | | 180 | Sec | Ref to frequency after 30 min |
| SSB Phase Noise | | 1 Hz | -106/- | -100/- | | dBc/Hz | For 10 MHz operational frequency |
| | | 10 Hz | -135/-95 | -125/-90 | | | |
| | | 100 Hz | -155/-130 | -145/-120 | | | |
| | | 1 kHz | -163/-155 | -155/-150 | | | |
| | | 10 kHz | -170/-170 | -165/-165 | | | |
| | | 100 kHz | -172/-175 | -168/-168 | | | |
| Allan variance | | 1s | 5 | 10 | | e-12 | |
| Aging | Per day | After 30 days of operation | 0.2 | 0.5 | | ppb | See chart below |
| | First year | | 20 | 50 | | ppb | |
| | For 20 years | | 0.3 | 0.5 | | ppm | |



| Environmental, mechanical conditions. | |
|---------------------------------------|-------------------------------------------------------------------|
| Operating temperature range | See chart below |
| Storage temperature range | -60°C to +90°C |
| Humidity | Hermetically sealed |
| Mechanical Shock | Per MIL-STD-202, 30G half sine pulse, 11ms |
| Vibration | Per MIL-STD-202, 10G swept sine 10 to 500Hz |
| Soldering Conditions | Hand solder only – not reflow compatible 260°C 10s (on pins) |
| Impermeability | Not hermetical. Do NOT wash or immerse into liquid when cleaning! |

* No frequency control option – on customer requirement

Ordering Code

| | | | | | | | | |
|-----------|---|---|---|---|---|---|---|--------|
| OCXO2522C | - | 2 | 6 | 4 | 2 | 1 | - | 10 MHz |
| Group | | 1 | 2 | 3 | 4 | 5 | | |

For example, OCXO2522C-26421-10MHz denotes the OCXO has the following specifications:

| | |
|----------------------------|-------------------|
| Temperature Range | -10°C to +60°C |
| Stability Over Temperature | ±10ppb |
| Aging per day / year | 1.0ppb / 0.10 ppm |
| Supply Voltage | 3.3V ±10% |
| Output | HCMOS |
| Frequency | 10MHz |

| 1 | Temperature Range |
|------|-------------------|
| Code | Specification |
| 1 | 0°C..+50°C |
| 2 | -10°C..+60°C |
| 3 | 0°C..+70°C |
| 4 | -20°C..+70°C |
| 5 | -30°C..+70°C |
| 6 | -40°C..+85°C |
| 7 | -55°C..+85°C |
| 8 | -40°C..+125°C |

| 2 | Stability Over Temperature | | |
|------|----------------------------|----------------------------------|---------------------|
| Code | Specification | Available temperature range code | |
| | | For 10 MHz | For 100 MHz |
| 1 | ±0.5 ppb | 1, 2 | - |
| 2 | ±1.0 ppb | 1, 2, 3, 4, 5, 6 | - |
| 3 | ±2.0 ppb | 1, 2, 3, 4, 5, 6 | - |
| 4 | ±3.0 ppb | 1, 2, 3, 4, 5, 6, 7 | 1 |
| 5 | ±5.0 ppb | 1, 2, 3, 4, 5, 6, 7 | 1, 2, 3, 4, 5, 6 |
| 6 | ±10.0 ppb | 1, 2, 3, 4, 5, 6, 7 | 1, 2, 3, 4, 5, 6, 7 |
| 7 | ±20.0 ppb | 1, 2, 3, 4, 5, 6, 7, 8 | 1, 2, 3, 4, 5, 6, 7 |
| 8 | ±50.0 ppb | 1, 2, 3, 4, 5, 6, 7, 8 | 1, 2, 3, 4, 5, 6, 7 |
| 9 | ±100.0 ppb | 1, 2, 3, 4, 5, 6, 7, 8 | 1, 2, 3, 4, 5, 6, 7 |

| 3 | Aging per day/year, ppb/ppm | |
|------|-----------------------------|---------|
| Code | Specification | |
| 1 | 0.2/0.02 | ≤10MHz |
| 2 | 0.3/0.03 | |
| 3 | 0.5/0.05 | ≤20MHz |
| 4 | 1.0/0.10 | ≤40MHz |
| 5 | 1.5/0.15 | ≤50MHz |
| 6 | 2.0/0.20 | ≤120MHz |
| 7 | 3.0/0.30 | |
| 8 | 5.0/0.50 | |

| 4 | Supply voltage |
|------|----------------|
| Code | Specification |
| 1 | 5V ±5% |
| 2 | 3.3V ±5% |
| 3 | 12V ±10% |

| 5 | Output |
|------|-----------------------|
| Code | Specification |
| 1 | HCMOS |
| 2 | Sine wave + 6 dBm min |

*for 10 MHz operational frequency

Disclaimer: Not all option choices available across entire frequency range
 Please contact Dynamic Engineers Inc. for further details.