



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
 TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

J7 C%8%&6 E !&\$\$\$A <n!' , \$\$\$A <n!5
2000-3800MHz SMD VCO

Features and Benefits


- Frequency Range:2000-3800MHz
- Supply Voltage:5.0V
- Current: 70mA Max.
- Output power: +7.5dBm Max.
- Tuning Voltage: 0.5-16V
- Phase noise: -108dBc/Hz@100KHz
- Operating temperature: -40°C--+85°C
- Size:12.7x12.7x3.9mm

Typical Applications

- SATCOM
- Receiver
- Test Equipment
- Radar
- Point –to-Point
- Radio
- MMDS
- WiMax

Mechanical Drawing & Pin Connections

Drawing No: MD140084-2

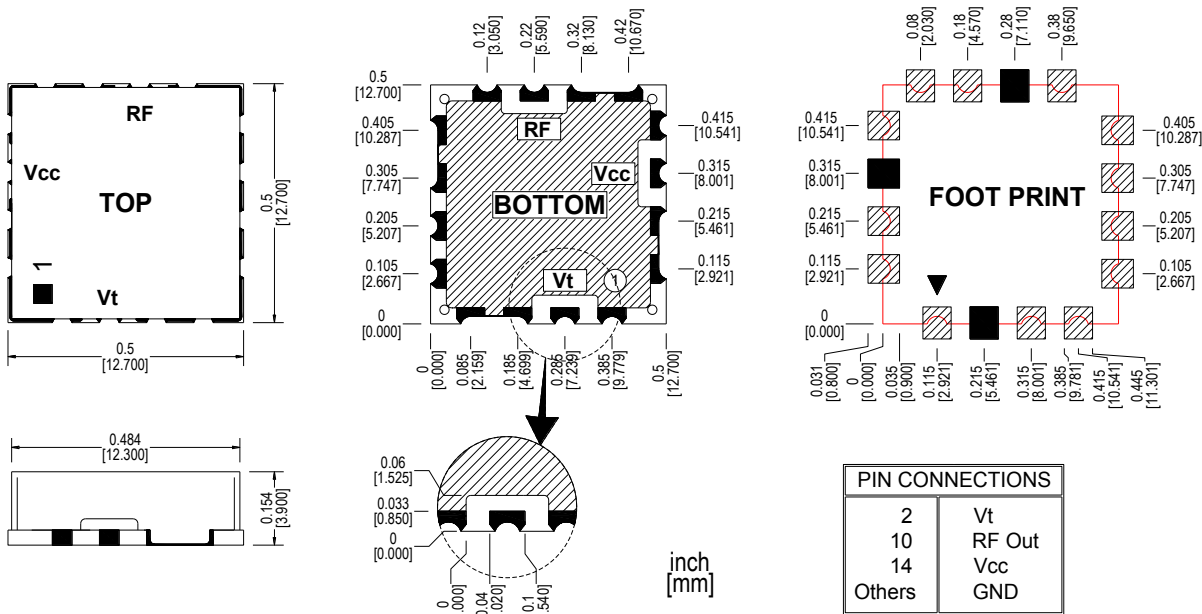



Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	2000		3800
Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA		70
Output Power	dBm	+0.5	+4.0	+7.5
Output Impedance	Ω		50	
Phase Noise @10kHz offset	dBc / Hz		-83	
Phase Noise @100kHz offset	dBc / Hz		-108	
Tuning Voltage (Vt)	V	0.5		+16
Tuning Voltage Sensitivity (Kv)	MHz / V		100-235	
2nd Harmonic Suppression	dBc			-10
Pushing Figure	MHz / V		5	
Pulling Figure	MHz		10	
Input Capacitance	pF		100	
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85